AMASPRO

America & Asia Products Inc



Address

Villa Lucre, Calle Las Palmeras, Boulevard las Colinas Panama, Republic of Panama

America & Asia Products Inc

CONTENTS

EMT, IMC, RSC Conduit & Fittings

1. EMT, IMC, RSC Conduit And Elbow
2. Conduit Bender
3. Connectors And Couplings
4. Conduit Strap
5. Entrance Caps
6. Conduit Body
7. Weatherproof Box
8. Bushing, Locknuts
9. Conduit Box, Covers

Unistrut Channel & Fittings

1. Unistrut Channel
2. Thread Rods
3. Strut Clamp, Spring Nut, Conduit Hanger, Sprinkler Clamps

Flexible Conduit & Fittings

1. Flexible Conduit
2. Liquid Tight Connector
3. Squeeze Connector
4. Cable Connector, Combination Couplings

Lighting, Meter Socket & Load Centers

1. Lamp Holder, Floodlight, LED
2. Meter Socket
3. Load Centers

BS4568, BS31 CONDUIT & ACCESSORIES

1. BS 4568, BS 31 Conduit
2. Junction Box
3. BS Accessories

EMT, IMC, RSC
CONDUIT & FITTINGS



1. EMT, IMC, RSC Conduit And Elbows 10-11
2. Conduit Bender 12
3. Connectors And Couplings 13-14
4. Conduit Strap 15
5. Entrance Caps 15
6. Conduit Body 14-15
7. Weatherproof Box 15
8. Bushing, Locknuts 15
9. Conduit Box, Covers 15

America & Asia Products Inc

EMT,IMC,RSC Conduit & Elbow

EMT CONDUIT



Nominal Diameter	External Diameter	Inside Diameter	Thickness Of Wall 1	Thickness Of Wall 2	Length 1		Length 2	
NPS	MM	MM	MM	MM	Ft	MM	Ft	MM
1/2"	17.93	15.80	1.067	0.85	10	3048	9.84	3000
3/4"	23.42	20.93	1.245	0.95	10	3048	9.84	3000
1"	29.54	26.64	1.448	1.10	10	3048	9.84	3000
1-1/4"	38.35	35.05	1.651	1.30	10	3048	9.84	3000
1-1/2"	44.20	40.89	1.651	1.30	10	3048	9.84	300
2"	55.80	52.50	1.651	1.30	10	3048	9.84	3000
2-1/2"	73.03	69.37	1.830	-	10	3048		
3"	88.90	85.24	1.830	-	10	3048		
3-1/2"	101.60	97.38	2.110	-	10	3048		
4"	114.30	110.08	2.110	-	10	3048		

IMC CONDUIT



Nominal Diameter	External Diameter	Thickness Of Wall 1	Thickness Of Wall 2	Thickness Of Wall 3	Length	
NPS	MM	MM	MM	MM	Ft	MM
1/2"	20.7	1.78	1.40	1.98	9	3029.0
3/4"	26.1	1.91	1.40	2.1	9	3029.0
1"	32.8	2.16	1.60	2.35	9	3022.6
1-1/4"	41.6	2.16	1.60	2.41	9	3022.6
1-1/2"	47.8	2.29	1.80	2.54	9	3022.6
2"	59.9	2.41	1.80	2.67	9	3022.6
2-1/2"	72.6	3.56	-	3.81	9	3009.9
3"	88.3	3.56	-	3.81	9	3009.9
3-1/2"	100.9	3.56	-	-	9	3003.6
4"	113.3	3.56	-	3.81	9	3003.6

RSC CONDUIT



Nominal Diameter	Metric	Threads	External Diameter	Thickness Of Wall	Length	
NPS	Designator	Per Inch	MM	MM	Ft	MM
1/2"	16	14	21.34	2.64	9	3030
3/4"	21	14	26.67	2.72	9	3030
1"	27	11-1/2	33.40	3.20	9	3025
1-1/4"	35	11-1/2	42.16	3.38	9	3025
1-1/2"	41	11-1/2	48.26	3.51	9	3025
2"	53	11-1/2	60.33	3.71	9	3025
2-1/2"	63	8	73.03	4.90	9	3010
3"	78	8	88.90	5.21	9	3010
3-1/2"	91	8	101.60	5.46	9	3005
4"	103	8	114.30	5.72	9	3005
5"	129	8	141.30	6.22	9	2995
6"	155	8	168.28	6.76	9	2995

AMASPRO
America & Asia Products Inc

EMT Elbows 90°/45°



CAT#	Size	External Diameter	Thickness Of Wall 1
		MM	MM
81	1/2"	17.93	1.07
82	3/4"	23.42	1.24
83	1"	29.54	1.45
84	1-1/4"	38.35	1.65
85	1-1/2"	44.2	1.65
86	2"	55.8	1.65
87	2-1/2"	73.03	1.83
88	3"	88.9	1.83
90	4"	114.3	2.11

Rigid Elbows 90°/45°



CAT#	Size	External Diameter	Thickness Of Wall 1
		MM	MM
61	1/2"	20.7	1.78
62	3/4"	26.1	1.91
63	1"	32.8	2.16
64	1-1/4"	41.6	2.16
65	1-1/2"	47.8	2.29
66	2"	59.9	2.41
67	2-1/2"	72.57	3.81
68	3"	88.29	3.81
70	4"	113.44	3.81

CONDUIT BENDER

Conduit Bender - Aluminum



CAT#	Size
CBM-01	1/2"
CBM-02	3/4"
CBM-03	1"

AMASPRO
America & Asia Products Inc

CONNECTORS & COUPLINGS

EMT Connertors-Zinc



CAT#	UPC#	Size
530	16290	1/2"
531	16300	3/4"
532	16310	1"
533	16320	1-1/4"
534	16330	1-1/2"
535	16340	2"
536	16350	2-1/2"
537	16360	3"
538	16370	3-1/2"
539	16380	4"

EMT Couplings- Zinc



CAT#	UPC#	Size
540	16490	1/2"
541	16500	3/4"
542	16510	1"
543	16520	1-1/4"
544	16530	1-1/2"
545	16540	2"
546	16550	2-1/2"
547	16560	3"
548	16570	3-1/2"
549	16580	4"

EMT Connertors-Aluminum



CAT#	UPC#	Size
530A	-	1/2"
531A	-	3/4"
532A	-	1"
533A	-	1-1/4"
534A	-	1-1/2"
535A	-	2"
536A	-	2-1/2"
537A	-	3"
538A	-	3-1/2"
539A	-	4"

EMT Couplings- Aluminum



CAT#	UPC#	Size
540A	-	1/2"
541A	-	3/4"
542A	-	1"
543A	-	1-1/4"
544A	-	1-1/2"
545A	-	2"
546A	-	2-1/2"
547A	-	3"
548A	-	3-1/2"
549A	-	4"

EMT Connectors - Steel



CAT#	UPC#	Size
530S	23000	1/2"
531S	23010	3/4"
532S	23020	1"
533S	23030	1-1/4"
534S	23040	1-1/2"
535S	23050	2"
536S	23060	2-1/2"
537S	23070	3"
538S	23080	3-1/2"
539S	23090	4"

EMT Couplings - Steel



CAT#	UPC#	Size
540S	23200	1/2"
541S	23210	3/4"
542S	23220	1"
543S	23230	1-1/4"
544S	23240	1-1/2"
545S	23250	2"
546S	23260	2-1/2"
547S	23270	3"
548S	23280	3-1/2"
549S	23290	4"

AMASPRO
America & Asia Products Inc

Compression Connectors - Zinc



CAT#	UPC#	Size
570	16590	1/2"
571	16600	3/4"
572	16610	1"
573	16620	1-1/4"
574	16630	1-1/2"
575	16640	2"
576	16650	2-1/2"
577	16660	3"
578	16670	3-1/2"
579	16680	4"

Compression Couplings - Zinc



CAT#	UPC#	Size
580	16910	1/2"
581	16920	3/4"
582	16930	1"
583	16940	1-1/4"
584	16950	1-1/2"
585	16960	2"
586	16970	2-1/2"
587	16980	3"
588	16990	3-1/2"
589	17000	4"

Compression Connectors - Steel



CAT#	UPC#	Size
570S	16790	1/2"
571S	16800	3/4"
572S	16810	1"
573S	16820	1-1/4"
574S	16830	1-1/2"
575S	16840	2"
576S	16841	2-1/2"
577S	16842	3"
578S	16843	3-1/2"
579S	16844	4"

Compression Couplings - Steel



CAT#	UPC#	Size
580S	17010	1/2"
581S	17020	3/4"
582S	17030	1"
583S	17040	1-1/4"
584S	17050	1-1/2"
585S	17060	2"
586S	17061	2-1/2"
587S	17062	3"
588S	17063	3-1/2"
589S	17064	4"

Rigid Couplings - Steel



CAT#	UPC#	Size
51	10130	1/2"
52	10140	3/4"
53	10150	1"
54	10160	1-1/4"
55	10170	1-1/2"
56	10180	2"
57	10190	2-1/2"
58	10200	3"
59	10210	3-1/2"
60	10220	4"

Conduit Nipples - Steel



CAT#	UPC#	Size
6451	-	1/2"
6452	-	3/4"
6453	-	1"
6454	-	1-1/4"
6455	-	1-1/2"
6456	-	2"
6457	-	2-1/2"
6458	-	3"
6459	-	3-1/2"
6460	-	4"

AMASPRO
America & Asia Products Inc

CONDUIT STRAP

EMT Conduit Strap - One Hole



CAT#	UPC#	Size
SP-10	15610	1/2"
SP-11	15620	3/4"
SP-12	15630	1"
SP-13	15640	1-1/4"
SP-14	15650	1-1/2"
SP-15	15660	2"
SP-16	15670	2-1/2"
SP-17	15680	3"
SP-18	15690	3-1/2"
SP-19	15700	4"

EMT Conduit Strap - Two Holes



CAT#	UPC#	Size
SP-20	14950	1/2"
SP-21	14960	3/4"
SP-22	14970	1"
SP-23	14980	1-1/4"
SP-24	14990	1-1/2"
SP-25	15000	2"
SP-26	15010	2-1/2"
SP-27	15020	3"
SP-28	15030	3-1/2"
SP-29	15040	4"

IMC/RGD Strap - One Hole



CAT#	UPC#	Size
SP-10R	15050	1/2"
SP-11R	15060	3/4"
SP-12R	15070	1"
SP-13R	15080	1-1/4"
SP-14R	15090	1-1/2"
SP-15R	15100	2"
SP-16R	15670	2-1/2"
SP-17R	15680	3"
SP-18R	15690	3-1/2"
SP-19R	15700	4"

IMC/RGD Strap - Two Holes



CAT#	UPC#	Size
SP-20R	15150	1/2"
SP-21R	15160	3/4"
SP-22R	15170	1"
SP-23R	15180	1-1/4"
SP-24R	15190	1-1/2"
SP-25R	15200	2"
SP-26R	15010	2-1/2"
SP-27R	15020	3"
SP-28R	15030	3-1/2"
SP-29R	15040	4"

ENTRANCE CAPS

Service Entrance Caps Clamp Type - Aluminum



CAT#	UPC#	Size
731	17640	1/2"
732	17650	3/4"
733	17660	1"
734	17670	1-1/4"
735	17680	1-1/2"
736	17690	2"
737	17700	2-1/2"
738	17710	3"
739	17720	3-1/2"
740	17730	4"

Service Entrance Caps Threaded Type - Aluminum



CAT#	UPC#	Size
741	17740	1/2"
742	17750	3/4"
743	17760	1"
744	17770	1-1/4"
745	17780	1-1/2"
746	17790	2"
747	17800	2-1/2"
748	17810	3"
749	17820	3-1/2"
750	17830	4"

AMASPRO
America & Asia Products Inc

CONDUIT BODIES
THREADED TYPE-ALUMINUM

LB



CAT#	UPC#	Size
LB-50	20840	1/2"
LB-75	20850	3/4"
LB-100	20860	1"
LB-125	20870	1-1/4"
LB-150	20880	1-1/2"
LB-200	20890	2"
LB-250	20900	2-1/2"
LB-300	20910	3"
LB-350	20920	3-1/2"
LB-400	20930	4"

LR



CAT#	UPC#	Size
LR-50	21240	1/2"
LR-75	21250	3/4"
LR-100	21260	1"
LR-125	21270	1-1/4"
LR-150	21280	1-1/2"
LR-200	21290	2"
LR-250	21300	2-1/2"
LR-300	21310	3"
LR-350	21320	3-1/2"
LR-400	21330	4"

LL



CAT#	UPC#	Size
LL-50	21040	1/2"
LL-75	21050	3/4"
LL-100	21060	1"
LL-125	21070	1-1/4"
LL-150	21080	1-1/2"
LL-200	21090	2"
LL-250	21100	2-1/2"
LL-300	21110	3"
LL-350	21120	3-1/2"
LL-400	21130	4"

C



CAT#	UPC#	Size
C-50	19900	1/2"
C-75	19910	3/4"
C-100	19920	1"
C-125	19930	1-1/4"
C-150	19940	1-1/2"
C-200	19950	2"
C-250	19960	2-1/2"
C-300	19970	3"
C-350	19980	3-1/2"
C-400	19990	4"

T



CAT#	UPC#	Size
T-50	21730	1/2"
T-75	21740	3/4"
T-100	21750	1"
T-125	21760	1-1/4"
T-150	21770	1-1/2"
T-200	21780	2"
T-250	21790	2-1/2"
T-300	21800	3"
T-350	21810	3-1/2"
T-400	21820	4"

Conduit Body Covers & Gasket



CAT#	UPC#	Size
CA-50	15520	1/2"
CA-75	15530	3/4"
CA-100	15540	1"
CA-125	15550	1-1/4",1-1/2"
CA-200	15560	2"
CA-250	15570	2-1/2",3"
CA-350	15580	3-1/2",4"
CS-50	15520	1/2"
CS-75	15530	3/4"
CS-100	15540	1"
CS-125	15550	1-1/4",1-1/2"
CS-200	15560	2"
CS-250	15570	2-1/2",3"
CS-350	15580	3-1/2",4"
CG-50	15710	1/2"
CG-75	15720	3/4"
CG-100	15730	1"
CG-125	15740	1-1/4",1-1/2"
CG-200	15750	2"
CG-250	15760	2-1/2",3"
CG-350	15770	3-1/2",4"

America & Asia Products Inc

CONDUIT BODIES
SCREWS TYPE-ALUMINUM

LBE



CAT#	UPC#	Size
ELB-50	20470	1/2"
ELB-75	20480	3/4"
ELB-100	20490	1"
ELB-125	20500	1-1/4"
ELB-150	20510	1-1/2"
ELB-200	20520	2"
ELB-250	20530	2-1/2"
ELB-300	20540	3"
ELB-350	20550	3-1/2"
ELB-400	20560	4"

LRE



CAT#	UPC#	Size
ELR-50	20630	1/2"
ELR-75	20640	3/4"
ELR-100	20650	1"
ELR-125	20660	1-1/4"
ELR-150	20670	1-1/2"
ELR-200	20680	2"
ELR-250	20681	2-1/2"
ELR-300	20682	3"
ELR-350	20683	3-1/2"
ELR-400	20684	4"

LLE



CAT#	UPC#	Size
ELL-50	20570	1/2"
ELL-75	20580	3/4"
ELL-100	20590	1"
ELL-125	20600	1-1/4"
ELL-150	20610	1-1/2"
ELL-200	20620	2"
ELL-250	20621	2-1/2"
ELL-300	20622	3"
ELL-350	20623	3-1/2"
ELL-400	20624	4"

CE



CAT#	UPC#	Size
EC-50	20410	1/2"
EC-75	20420	3/4"
EC-100	20430	1"
EC-125	20440	1-1/4"
EC-150	20450	1-1/2"
EC-200	20460	2"
EC-250	20461	2-1/2"
EC-300	20462	3"
EC-350	20463	3-1/2"
EC-400	20464	4"

TE



CAT#	UPC#	Size
ET-50	20690	1/2"
ET-75	20700	3/4"
ET-100	20710	1"
ET-125	20720	1-1/4"
ET-150	20730	1-1/2"
ET-200	20740	2"
ET-250	20781	2-1/2"
ET-300	20782	3"
ET-350	20783	3-1/2"
ET-400	20784	4"

Conduit Body Covers & Gasket



CAT#	UPC#	Size
CA-50	15520	1/2"
CA-75	15530	3/4"
CA-100	15540	1"
CA-125	15550	1-1/4",1-1/2"
CA-200	15560	2"
CA-250	15570	2-1/2",3"
CA-350	15580	3-1/2",4"
CS-50	15520	1/2"
CS-75	15530	3/4"
CS-100	15540	1"
CS-125	15550	1-1/4",1-1/2"
CS-200	15560	2"
CS-250	15570	2-1/2",3"
CS-350	15580	3-1/2",4"
CG-50	15710	1/2"
CG-75	15720	3/4"
CG-100	15730	1"
CG-125	15740	1-1/4",1-1/2"
CG-200	15750	2"
CG-250	15760	2-1/2",3"
CG-350	15770	3-1/2",4"

AMASPRO
America & Asia Products Inc

WEATHERPROOF BOX

1-GANG BOXES 2"DEEP
1-GANG BOXES 2-5/8"DEEP



CAT#	UPC#	Outlet Holes	Holes Size
1G50-3	81878	3	1/2"
1G50-4	81880	4	1/2"
1G50-5	81882	5	1/2"
1G50-5X	85258	5	1/2"
1G75-3	81879	3	3/4"
1G75-4	81881	4	3/4"
1G75-5	81883	5	3/4"
1G75-5X	85259	5	3/4"
1G100-3	83999	3	1"
1GD50-3	85107	3	1/2"
1GD50-4	-	4	1/2"
1GD50-5	-	5	1/2"
1GD50-5X	85080	5	1/2"
1GD75-3	85078	3	3/4"
1GD75-4	-	4	3/4"
1GD75-5	-	5	3/4"
1GD75-5X	85081	5	3/4"
1GD100-3	85079	3	1"

2-GANG BOXES 2"DEEP
2-GANG BOXES 2-5/8"DEEP



CAT#	UPC#	Outlet Holes	Holes Size
2G50-3	81884	3	1/2"
2G50-4	81886	4	1/2"
2G50-5	81888	5	1/2"
2G50-5X	84083	5	1/2"
2G50-7	85091	7	1/2"
2G50-7X	85093	7	1/2"
2G50-9	-	9	1/2"
2G75-3	81885	3	3/4"
2G75-4	81887	4	3/4"
2G75-5	81889	5	3/4"
2G75-5X	84084	5	3/4"
2G75-7	85092	7	3/4"
2G75-7X	84094	7	3/4"
2G75-9	-	9	3/4"
2G100-3	84002	3	1"
2G100-4	-	4	1"
2G100-5X	84085	5	1"
2GD50-5	85086	5	1/2"
2GD75-5	85087	5	3/4"
2GD100-5	85088	5	1"
2GD50-7X	-	7	1/2"
2GD75-7X	-	7	3/4"
2GD100-7X	-	7	1"

America & Asia Products Inc

BUSHING & LOCKNUTS

Conduit Locknuts - Zinc



CAT#	UPC#	Size
241	12040	1/2"
242	12050	3/4"
243	12060	1"
244	12070	1-1/4"
245	12080	1-1/2"
246	12090	2"
247	12100	2-1/2"
248	12110	3"
249	12120	3-1/2"
250	12130	4"

Conduit Locknuts - Steel



CAT#	UPC#	Size
281	12300	1/2"
282	12310	3/4"
283	12320	1"
284	12330	1-1/4"
285	12340	1-1/2"
286	12350	2"
287	12360	2-1/2"
288	12370	3"
289	12380	3-1/2"
290	12390	4"

Conduit Bushings - Aluminum




CAT#	UPC#	Size
311	-	1/2"
312	-	3/4"

Conduit Bushings - Zinc



CAT#	UPC#	Size
301	12530	1/2"
302	12540	3/4"
303	12550	1"
304	12560	1-1/4"
305	12570	1-1/2"
306	12580	2"
307	12590	2-1/2"
308	12600	3"
309	12610	3-1/2"
310	12620	4"

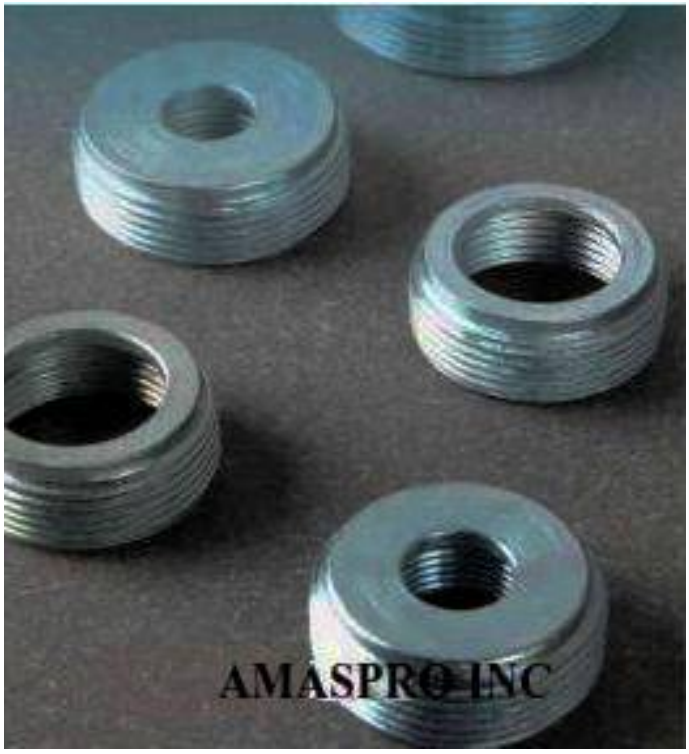

Redusing Bushing - Steel

CAT#	UPC#	Size
RB1	20060	1/2" x 3/8"
RB2	20070	3/4" x 1/2"
RB3	20080	1" x 1/2"
RB4	20090	1" x 3/4"
RB5	20100	1-1/4" x 1/2"
RB6	20110	1-1/4" x 3/4"
RB7	20120	1-1/4" x 1"
RB8	20130	1-1/2" x 1/2"
RB9	20140	1-1/2" x 3/4"
RB10	20150	1-1/2" x 1"
RB11	20160	1-1/2" x 1-1/4"
RB12	20170	2" x 1/2"
RB13	20180	2" x 3/4"
RB14	20190	2" x 1"
RB15	20200	2" x 1-1/4"
RB16	20210	2" x 1-1/2"

AMASPRO
America & Asia Products Inc

CONDUIT BOX & COVERS

Square Conduit Boxes 4"x 4"



	CAT#	Knockouts		
		EA.Side Conduit	EA.End Conduit	Bottom Conduit
1-1/2" Deep Boxes	52151-1/2"	3-1/2"	3-1/2"	5-1/2"
	52151-3/4"	2-3/4"	2-3/4"	5-1/2"
	52151-1/2&3/4	2-1/2"& 1-3/4"	2-1/2"& 1-3/4"	3-1/2"& 2-3/4"
1-1/2" Deep Extensions	52151E-1/2"	3-1/2"	3-1/2"	
	52151E-3/4"	2-3/4"	2-3/4"	
	52151E-1/2&3/4	2-1/2"& 1-3/4"	2-1/2"& 1-3/4"	

Rectangular Conduit Boxes 2"x 4"



	CAT#	Knockouts		
		EA.Side Conduit	EA.End Conduit	Bottom Conduit
4" H x 2-1/8" W 1-7/8" D BOXES	58361-1/2	3-1/2"	1-1/2"	3-1/2"
	58361-3/4	2-3/4"	1-3/4"	2-3/4"
	58361-1/2&3/4	2-1/2"& 1-3/4"	1-3/4"	2-1/2"& 1-3/4"
1-7/8" Deep Extensions	59361E-1/2	3-1/2"	1-1/2"	
	59361E-3/4	2-3/4"	1-3/4"	
	59361E-1/2&3/4	2-1/2"& 1-3/4"	1-3/4"	

Octagonal Conduit Boxes 4"



	CAT#	Knockouts		
		EA.Side Conduit	EA.End Conduit	Bottom Conduit
1-1/2" Deep Boxes	54361-1/2	1-1/2"	1-1/2"	5-1/2"
	54361-3/4	1-3/4"	1-3/4"	3-1/2"& 2-3/4"
	54361-1/2&3/4	1-1/2"	1-3/4"	3-1/2"& 2-3/4"
1-1/2" Deep Extensions	54361E-1/2	1-1/2"	1-1/2"	
	54361E-3/4	1-3/4"	1-3/4"	
	54361E-1/2&3/4	1-1/2"	1-3/4"	

Square Device Rings 4"



CAT#	Raised
TC41-000	Flat
TC41-002	1/4"
TC41-003	1/2"
TC41-004	5/8"
TC41-005	3/4"
TC41-006	1"
TC41-007	1-1/4"
TC41-008	1-1/2"
TC41-009	2"



CAT#	Raised
TC42-000	Flat
TC42-001	1/4"
TC42-002	1/4"
TC42-003	1/2"
TC42-004	5/8"
TC42-005	3/4"
TC42-006	1"
TC42-007	1-1/4"
TC42-008	1-1/2"
TC42-009	2"

4RBC




4RBCK



TC51



UNISTRUT
CHANNEL & FITTINGS

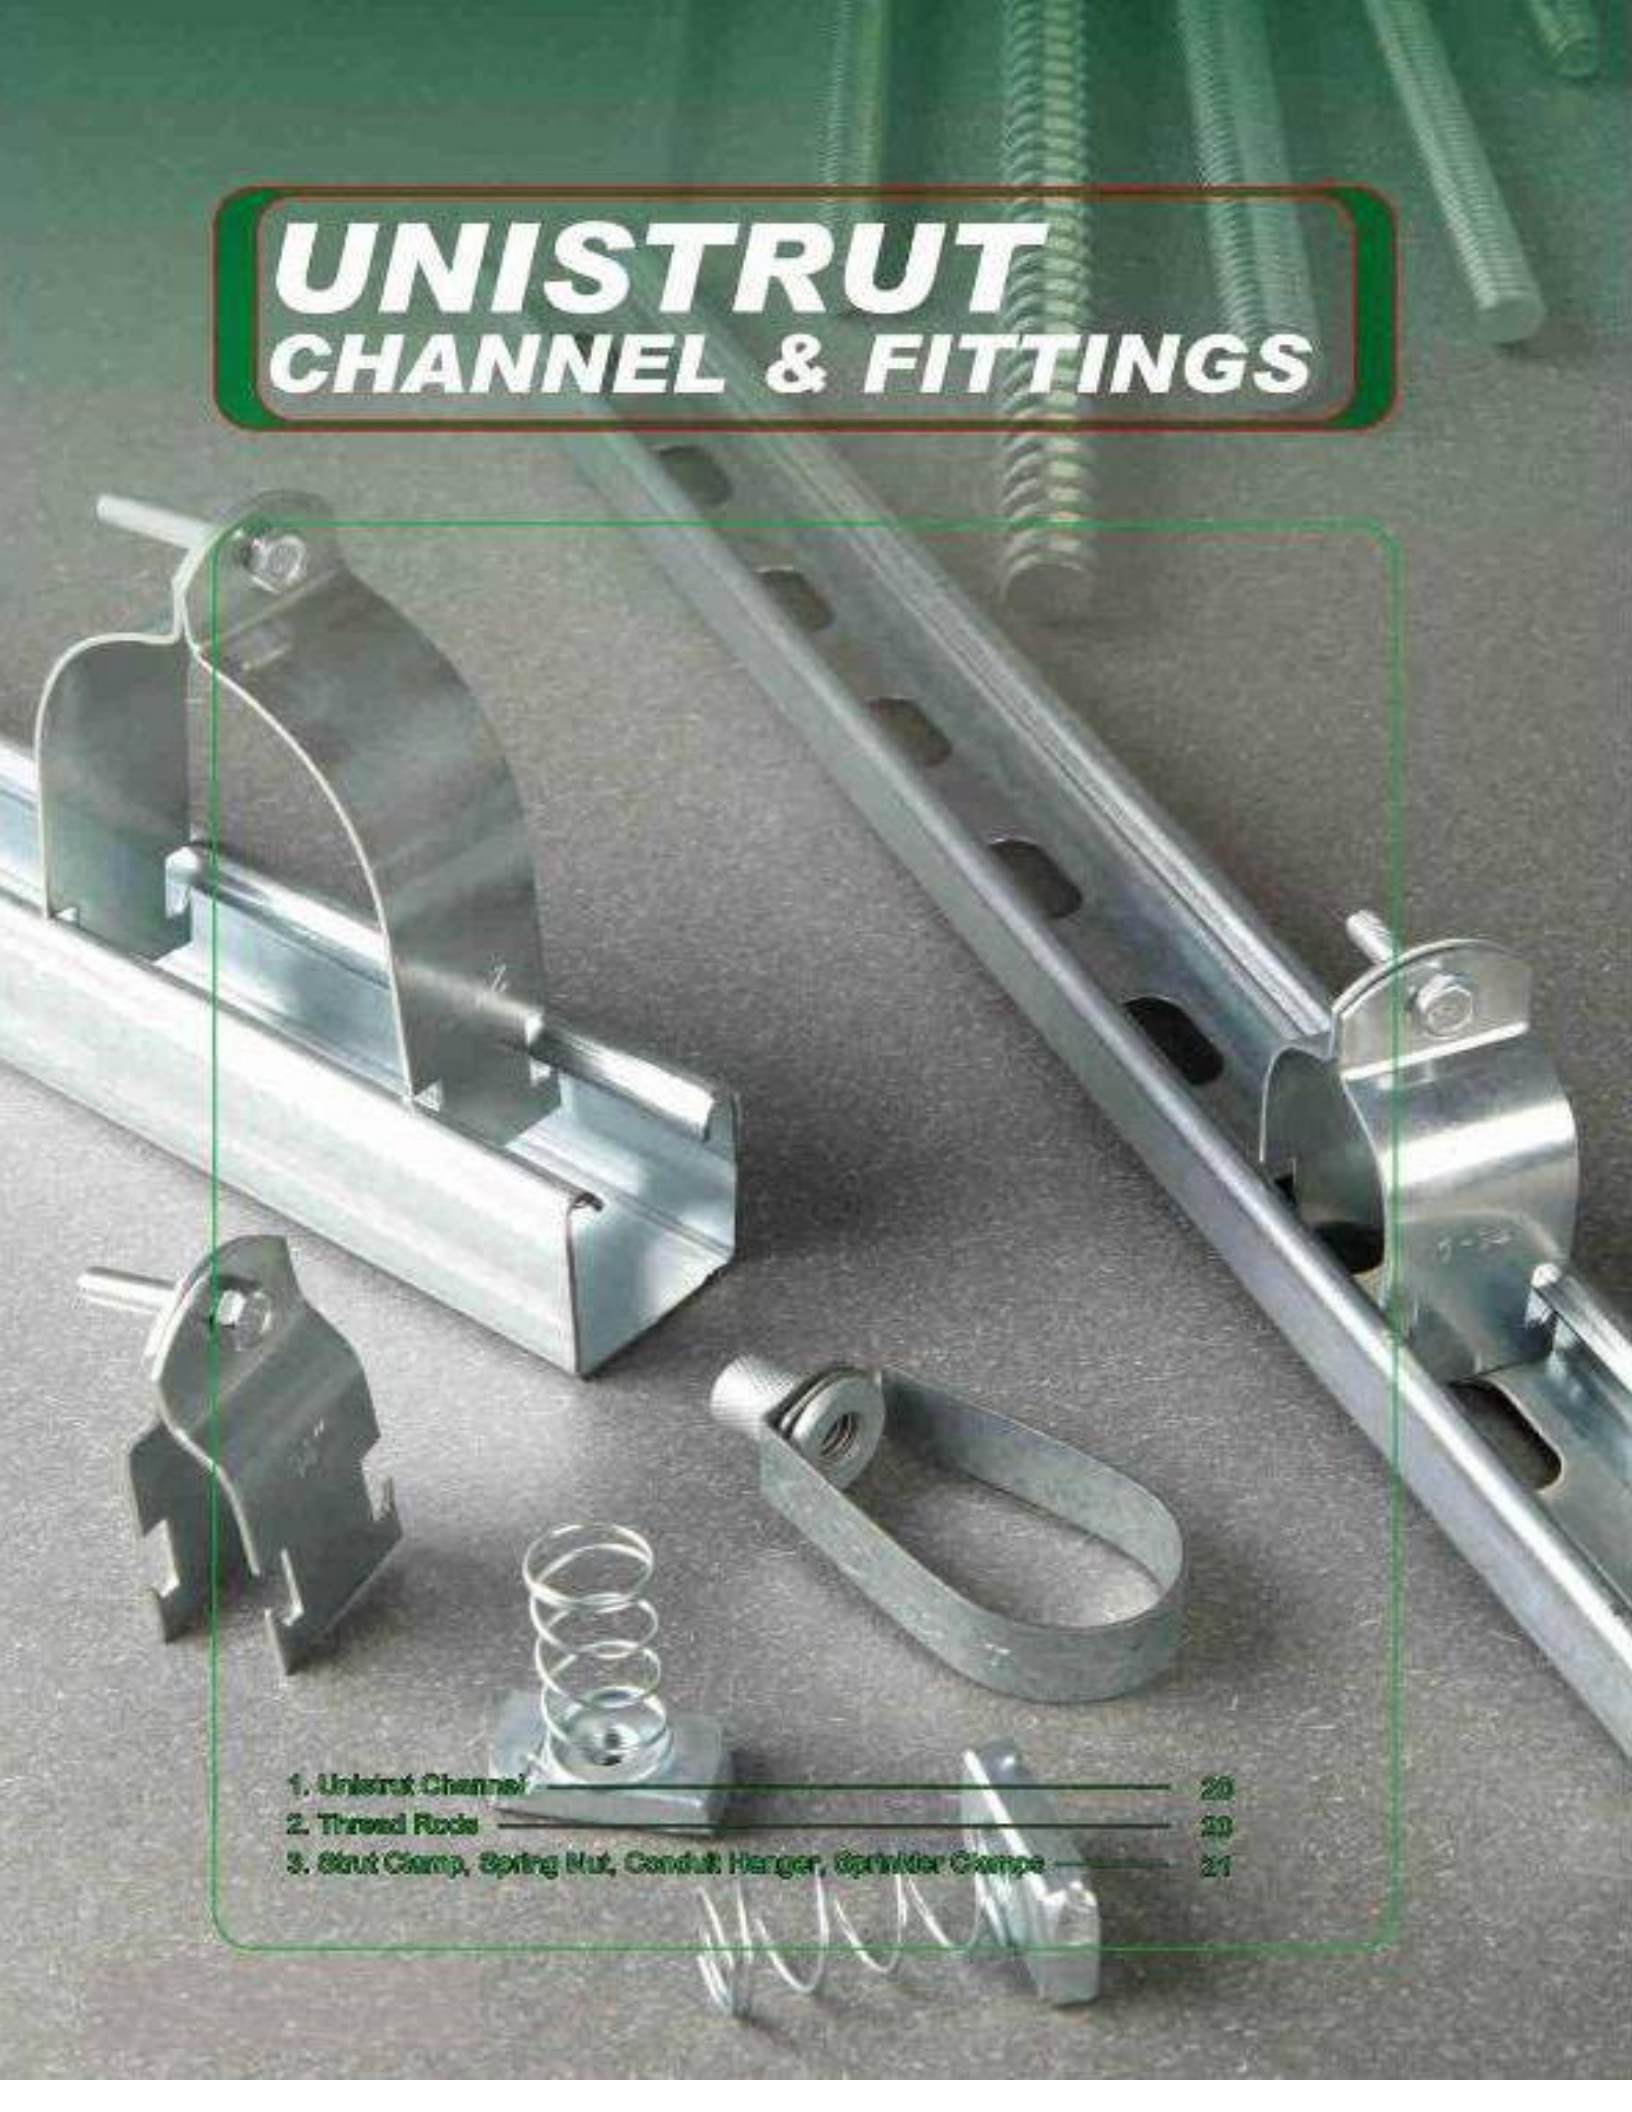

1. Unistrut Channel ——— 20
2. Thread Rods ——— 20
3. Strut Clamp, Spring Nut, Conduit Hanger, Sprinkler Clamps ——— 21

AMASPRO
America & Asia Products Inc

UNISTRUT CHANNEL

Strut Channels Slotted Unistrut Channel




CAT#	Dimension			Thickness Of Wall		Length	
	Width	Height	MM	Gauge	MM	Ft	MM
UC37	1-5/8"	13/16"	41x21	17	1.5	9.84	3000
UC34	1-5/8"	13/16"	41x21	14	2.0	9.84	3000
UC32	1-5/8"	13/16"	41x21	12	2.5	9.84	3000
UC117	1-5/8"	1-5/8"	41x41	17	1.5	9.84	3000
UC114	1-5/8"	1-5/8"	41x41	14	2.0	9.84	3000
UC112	1-5/8"	1-5/8"	41x41	12	2.5	9.84	3000

Strut Channels Plain Unistrut Channel



CAT#	Dimension			Thickness Of Wall		Length	
	Width	Height	MM	Gauge	MM	Ft	MM
UC37 S	1-5/8"	13/16"	41x21	17	1.5	9.84	3000
UC34 S	1-5/8"	13/16"	41x21	14	2.0	9.84	3000
UC32 S	1-5/8"	13/16"	41x21	12	2.5	9.84	3000
UC117 S	1-5/8"	1-5/8"	41x41	17	1.5	9.84	3000
UC114 S	1-5/8"	1-5/8"	41x41	14	2.0	9.84	3000
UC112 S	1-5/8"	1-5/8"	41x41	12	2.5	9.84	3000

THREAD RODS

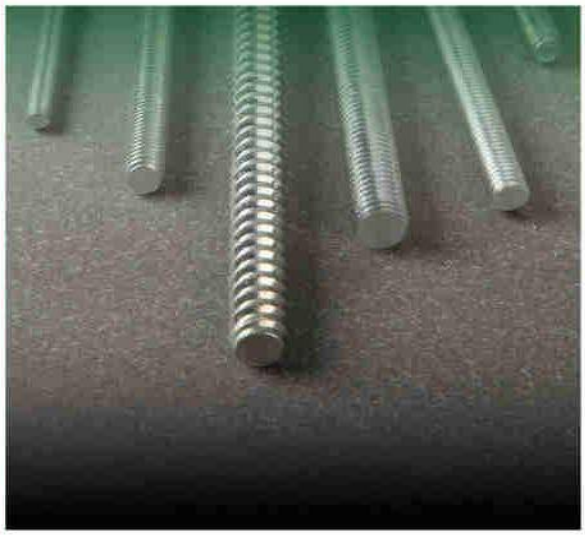

Thread Rods Electro-Galvanized

CAT#	UPC#	Size
TR-14	-	1/4"
TR-516	-	5/16"
TR-38	-	3/8"
TR-12	-	1/2"
TR-58	-	5/8"
TR-34	-	3/4"
TR-78	-	7/8"
TR-M6	-	M6
TR-M8	-	M8
TR-M10	-	M10
TR-M12	-	M12

AMASPRO
America & Asia Products Inc

STRUT CLAMP, SPRING NUT, CONDUIT HANGER

Channel Nut With Spring



CAT#	UPC#	Size
S2	83691	M6
S3	83692	M8
S4	83693	M10
S5	-	M12

Strut Clamp



CAT#	UPC#	Size
2101	41031	1/2"
2102	41032	3/4"
2103	41033	1"
2104	41034	1-1/4"
2105	41035	1-1/2"
2106	41036	2"
2107	41037	2-1/2"
2108	41038	3"
2109	41039	3-1/2"
2110	41040	4"

Conduit Hanger



CAT#	UPC#	Size
601	15830	1/2"
602	15840	3/4"
603	15850	1"
604	15860	1-1/4"
605	15870	1-1/2"
606	15890	2"
607	15900	2-1/2"
608	15910	3"
609	15920	3-1/2"
610	15930	4"


Sprinkler Clamps Adjustable Swivel Ring



CAT#	Size
S-50	1/2"
S-75	3/4"
S-100	1"
S-125	1-1/4"
S-150	1-1/2"
S-200	2"
S-250	2-1/2"
S-300	3"
S-350	3-1/2"
S-400	4"
S-500	5"
S-600	6"
S-800	8"

AMASPRO INC
America & Asia Products Inc

FLEXIBLE CONDUIT & FITTINGS

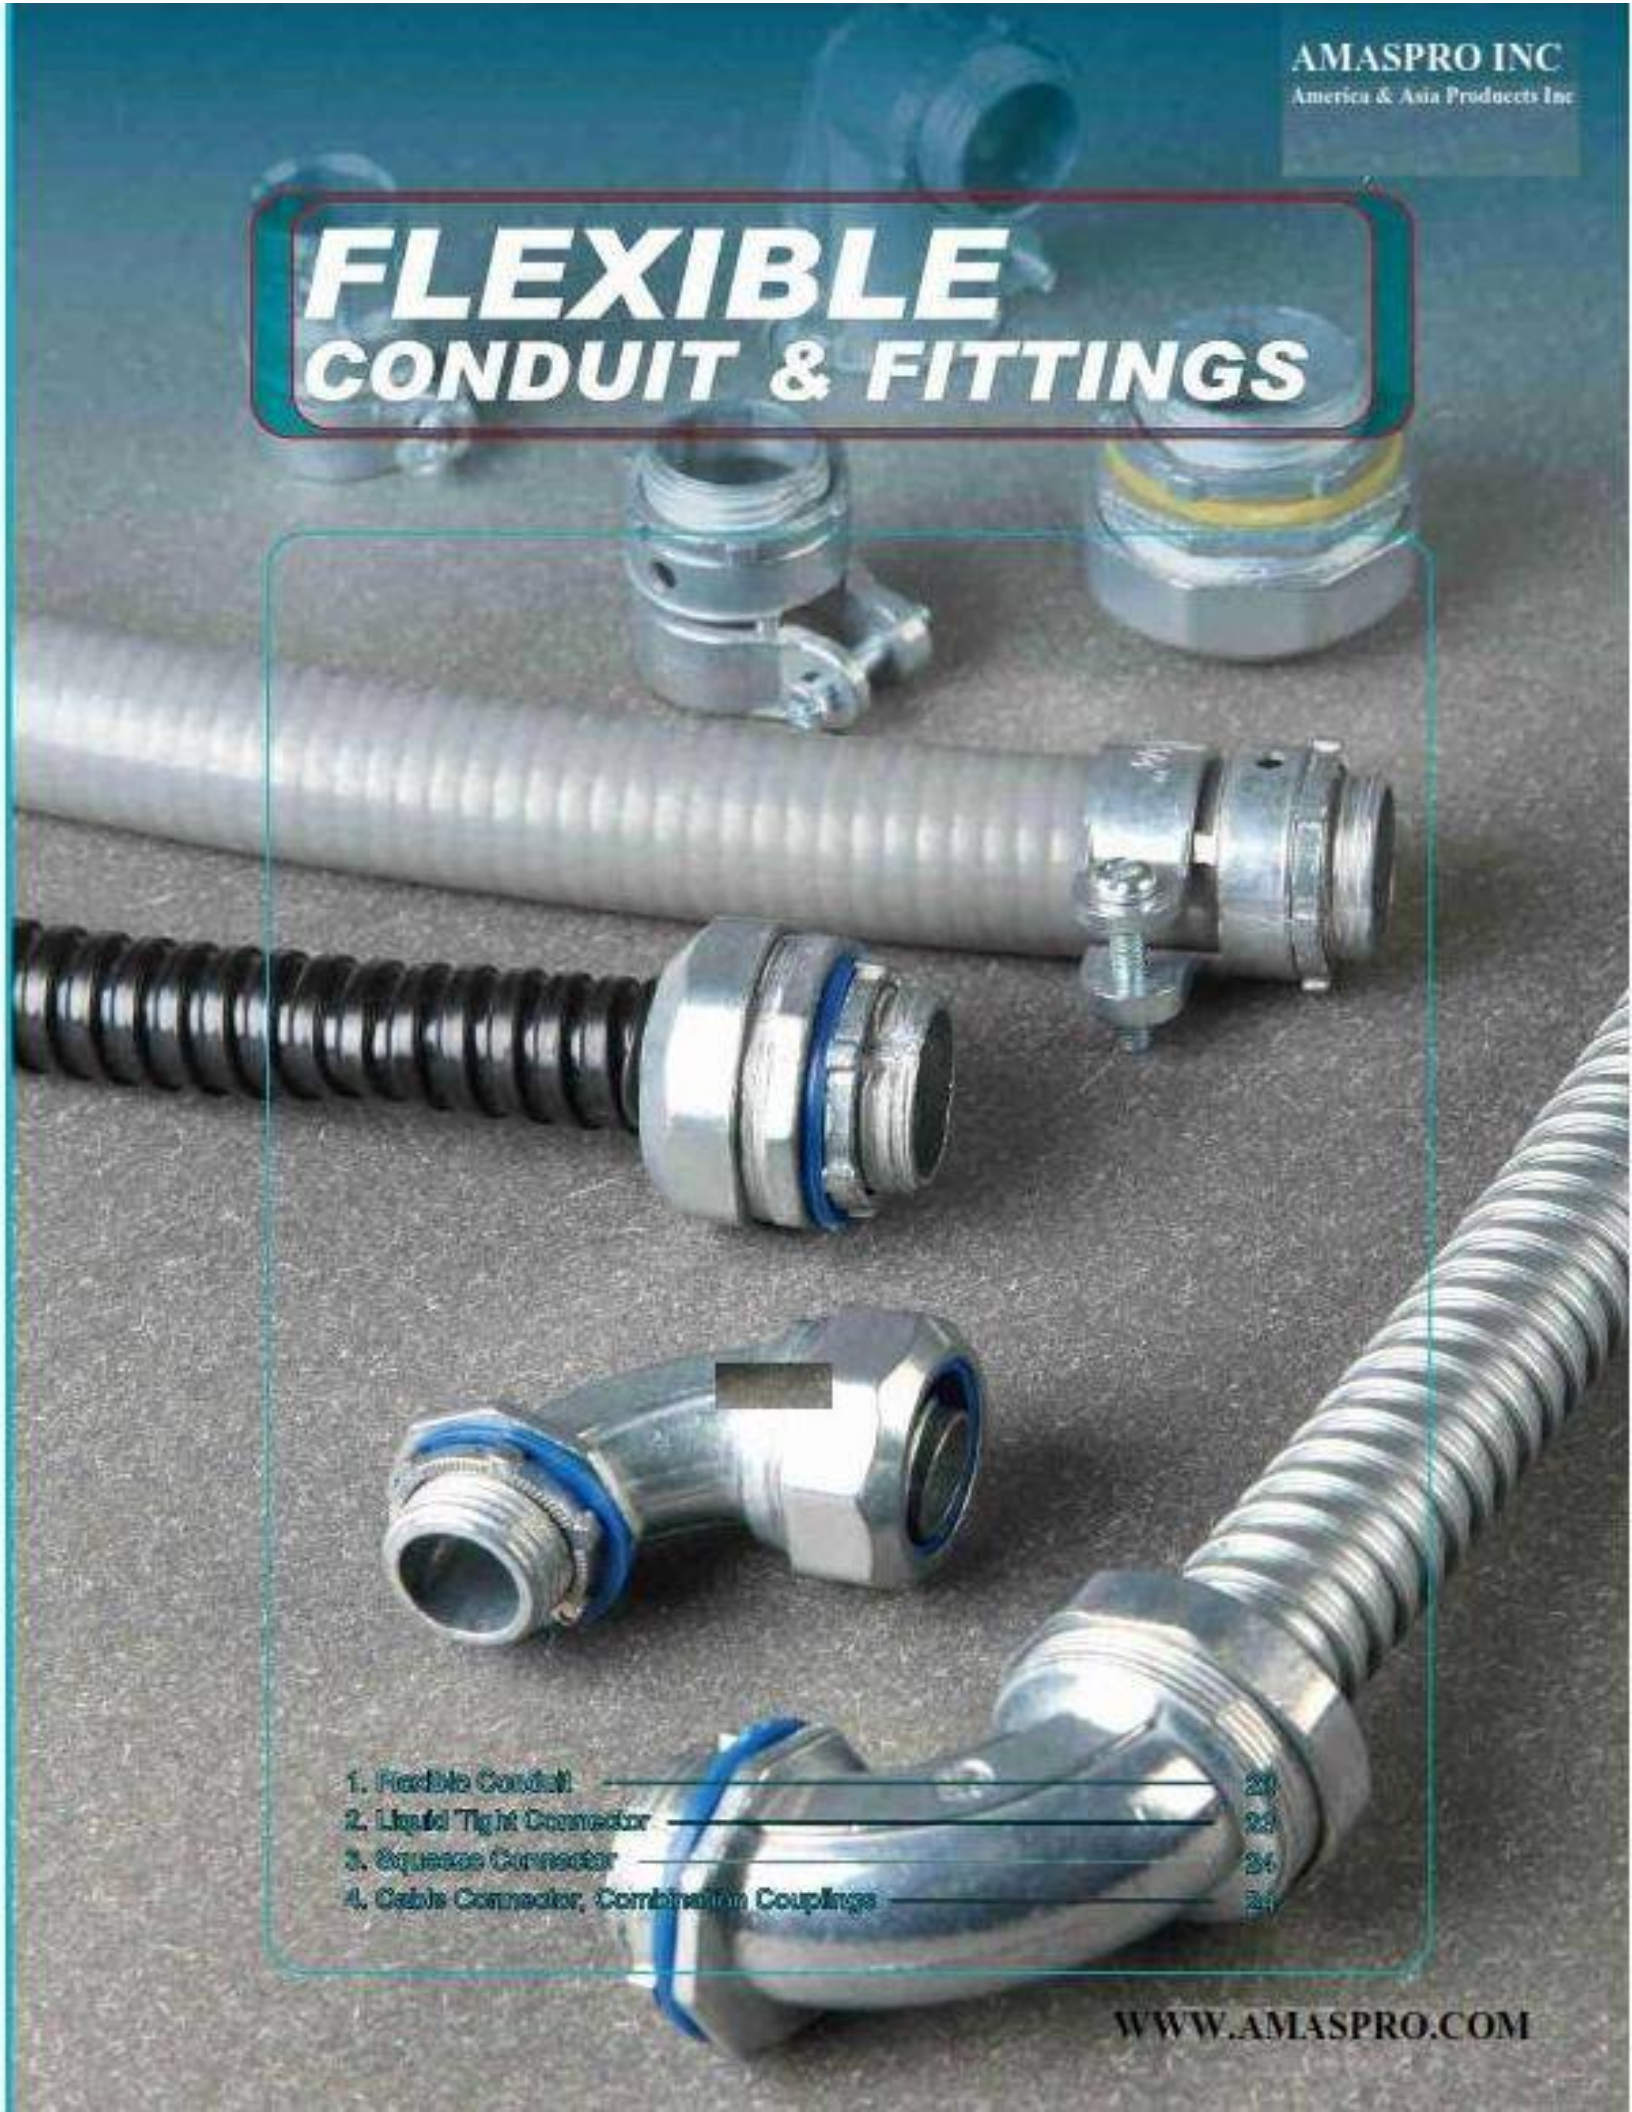

1. Flexible Conduit ——— 20
2. Liquid Tight Connector ——— 22
3. Squeeze Connector ——— 24
4. Cable Connector, Combination Couplings ——— 24

WWW.AMASPRO.COM

AMASPRO
America & Asia Products Inc

FLEXIBLE CONDUIT

Flexible Steel Conduit




Constuction	Normal Size	UPC#	Inside Diameter		Outside Diameter		Min.Bend Radius	Length Of Reel
	Inch		Min(mm)	Max(mm)	Min(mm)	Max(mm)	mm	mm
1.Glavanized steel,core, non-liquidtight 2.Squarelock style	3/8"	85588	12.30	12.80	15.70	16.20	33	50
	1/2"	82021	15.80	16.30	19.20	19.70	38	50
	3/4"	85247	20.70	21.20	24.50	25.10	45	50
	1"	85248	26.00	26.60	30.40	31.00	55	50
	1-1/4"	85249	34.70	35.40	39.60	40.30	62	30
	1-1/2"	85250	40.00	40.60	45.20	45.80	90	30
	2"	85251	51.30	51.90	56.50	57.10	110	20

Liquid Tight Flexible Steel Conduit -Thin PVC Coated



Constuction	Normal Size	UPC#	Inside Diameter		Outside Diameter		Min.Bend Radius	Length Of Reel
	Inch		Min(mm)	Max(mm)	Min(mm)	Max(mm)	mm	mm
1.Glavanized steel,core 2.Squarelock style 3.Vacuum PVC jacket, flexible Working Temperature: 1.-10°--70°	3/8"	30070	12.30	12.80	16.70	17.20	50	50
	1/2"	30080	15.80	16.30	20.20	20.70	65	50
	3/4"	30090	20.70	21.20	25.50	26.10	75	50
	1"	30100	26.00	26.60	31.60	32.20	100	50
	1-1/4"	23412	34.70	35.40	40.80	41.50	125	30
	1-1/2"	23415	40.00	40.60	46.60	47.20	150	30
	2"	23416	51.30	51.90	58.70	58.70	175	20

Liquid Tight Flexible Steel Conduit -Thick PVC Coated



Constuction	Normal Size	UPC#	Inside Diameter		Outside Diameter		Min.Bend Radius	Length Of Reel
	Inch		Min(mm)	Max(mm)	Min(mm)	Max(mm)	mm	mm
1.Glavanized steel,core,corrosion resistant 2.Liquidtight PVC jacket,flexible,flame retardant,resist oils,mild acid Working Temperature: 1.-10°--70°	3/8"	30000	12.29	12.80	17.50	18.00	50.5	30
	1/2"	30010	15.80	16.31	20.80	21.30	82.5	30
	3/4"	30020	20.83	21.34	26.20	26.70	108	30
	1"	30030	26.44	27.08	32.80	33.40	165	20
	1-1/4"	30040	35.05	35.81	41.40	42.20	203	20
	1-1/2"	30050	40.10	40.64	47.40	48.30	228.5	20
	2"	30060	51.30	51.94	59.40	60.30	282.5	15

LIQUID TIGHT CONNECTOR

Liquid Tight Connector Straight Type - Zinc



CAT#	UPC#	Size
620	14260	1/2"
621	14270	3/4"
622	14280	1"
623	14290	1-1/4"
624	14300	1-1/2"
625	14310	2"
626	14320	2-1/2"
627	14330	3"
628	14340	3-1/2"
629	14350	4"

Liquid Tight Connector Angle Type - Zinc



CAT#	UPC#	Size
630	14620	1/2"
631	14630	3/4"
632	14640	1"
633	14650	1-1/4"
634	14660	1-1/2"
635	14670	2"
636	14680	2-1/2"
637	14690	3"
638	14700	3-1/2"
639	14710	4"

AMASPRO
America & Asia Products Inc

SQUEEZE CONNECTOR

BX Connector Straight Type - Zinc



CAT#	UPC#	Size
550	11000	1/2"
551	11010	3/4"
552	11020	1"
553	11030	1-1/4"
554	11040	1-1/2"
555	11050	2"

BX Connector Angle Type - Zinc



CAT#	UPC#	Size
560M	10340	3/8"
560	10350	1/2"
561	10360	3/4"
562	10370	1"

CABLE CONNETOR & COMBINATION COUPLINGS

Combination Couplings - Zinc



CAT#	UPC#	Size
5811	-	1/2"
5812	-	3/4"

NM & SE Cable Connector - Aluminum



CAT#	UPC#	Size
143R	19580	1/2"
144R	19590	3/4"
145R	19600	1"
146R	19610	1-1/4"
147R	19620	1-1/2"
148R	19630	2"

NM Clamp Type Connectors - Zinc



CAT#	UPC#	Size
951	-	1/2"
952	19500	3/4"
953	19510	1"
954	19520	1-1/4"
955	19530	1-1/2"
956	19540	2"



LIGHTING,
METER SOCKET, LOAD CENTERS



1. Lamp Holder, Floodlight, LED 25-26
2. Meter Socket 28
3. Load Centers 29

America & Asia Products Inc

LAMP HOLDER, FLOODLIGHT, LED

PAR Lamp Holder



CAT#	UPC#	Size
WP1	80868	1/2"

Lamp



CAT#	UPC#	Lamp Holder	Size
WL1	-	1	1/2"
WL2	-	2	1/2"

Round Covers With Gaskets



CAT#	UPC#	HOLES	Size
WRC1	81132	1	1/2"
WRC2	81133	2	1/2"
WRC3	81134	3	1/2"
WRC1 (White)	83616	1	1/2"
WRC2 (White)	83617	2	1/2"
WRC3 (White)	83618	3	1/2"

Aluminum Outdoor LED Floodlight




CAT#	Lamp Luminous Flux	Input voltage	Color Temperature	CRI	Power	Emitting Angle
	Lm		CCT	Ra>	W	°
TG30-1	About 2400	AC 100~240V, 50~60Hz	Cool White	70	30	120°
TG40-1	About 3200	AC 100~240V, 50~60Hz	2500-8000K	75	40	120°
TG50-1	About 4000	AC 100~240V, 50~60Hz	3000-8000K	80	50	120°
TG70-1	About 5120	AC 100~240V, 50~60Hz	Cool White	85	70	120°

AMASPRO
America & Asia Products Inc


LED Bulb 7W




size



Distribution of light intensity




Light distribution curve



CAT#	Lamp Luminous Flux	Input Voltage	Color Temperature	CRI	Power
	Lm		CCT	Ra>	W
LD7-1	700	AC85-135,AC185-265	Cool White	70	7

T3 2u Energy Saving Lamp 5-9w






CAT#	POWER	Lumens	Lamp base	D	L	Package	Carton
	W	Lm		MM	MM		cm
DEF/M-5	5	≥175	E14/E27/E26/B22	37	108	100	45*22*28
DEF/M-7	7	≥285	E14/E27/E26/B22	37	118	100	45*22*30
DEF/M-9	9	≥405	E14/E27/E26/B22	37	128	100	45*22*32

T4 2u Energy Saving Lamp 5-15w






CAT#	POWER	Lumens	Lamp base	D	L	Package	Carton
	W	Lm		MM	MM		cm
DEF-5	5	≥175	E14/E27/E26/B22	40	110	100	48*24*28
DEF-7	7	≥285	E14/E27/E26/B22	40	120	100	48*24*30
DEF-9	9	≥405	E14/E27/E26/B22	40	130	50	48*24*17
DEF-11	11	≥530	E14/E27/E26/B22	40	140	50	48*24*18
DEF-13	13	≥660	E14/E27/E26/B22	40	150	50	48*24*19
DEF-15	15	≥800	E14/E27/E26/B22	40	160	50	48*24*20

T2 3u Energy Saving Lamp 5-11w






CAT#	POWER	Lumens	Lamp base	D	L	Package	Carton
	W	Lm		MM	MM		cm
DEC/S-5	5	≥250	E14/E27/E26/B22	33	97	100	41*20*24
DEC/S-7	7	≥340	E14/E27/E26/B22	33	103	100	41*20*26
DEC/S-9	9	≥440	E14/E27/E26/B22	33	109	100	41*20*27
DEC/S-11	11	≥530	E14/E27/E26/B22	33	115	100	41*20*28

AMASPRO
America & Asia Products Inc

T2 Half Spiral Energy Saving Lamp 11-15w



CAT#	POWER	Lumens	Lamp base	D	L	Package	Carton
	W	Lm		MM	MM		cm
DEM/S-11	11	≥530	E14/E27/E26/B22	45	105	100	53*26*27
DEM/S-13	13	≥660	E14/E27/E26/B22	45	110	100	53*26*28
DEM/S-15	15	≥800	E14/E27/E26/B22	45	115	100	53*26*29

METER SOCKET

ROUND METER SOCKET



	CAT#	Description	Fixed Hubs Size
Round Meter Socket--Aluminum	OS-100B	1 Phase,100A,120/240V,4Jaw	1/2"
	OS-100C	1 Phase,100A,120/240V,4Jaw	3/4"
	OS-100D	1 Phase,100A,120/240V,4Jaw	1"
	OS-100E	1 Phase,100A,120/240V,4Jaw	1-1/4"

Application:
1、Temporary Service
2、Outdoor Advertising
3、Small Customer Service
4、Other Low Amperage Requirements

Features:
Our enclosure is made of die casting aluminum.The electrostatically applied expoxy and polyester resins,which are baked on,from a durable,light gray exterior.The current carrying parts are of copper alloy.The ground connector is designed to unsure a positive electrical connectionby effectively clamping the connector against a serrated surface.

SQUARE METER SOCKET



	CAT#	Description	Fixed Hubs Size
Meter Socket MS-100	MS-100	1 Phase,100A,120/240V,4Jaw	1/2"

Features:
1、Standard meter sockets are manufactured from 1.2-1.5mm galvanized steel with a baked gray powder polyester paint finish to improve corrosion resistance.
2、These meter socket suitable for single Phase,service voltage 600Vac Max.
3、Ample gutter space for easy wiring.
4、Convenient knockouts in side back and bottom.
5、Lay in type terminals with pressure plates for easy connections.

AMASPRO
America & Asia Products Inc

LOAD CENTERS

GDP Series Load Centers



GDP4S

Product Number	Front Type	Main Ampere Rating	Rated Voltage	No. of way
			V	
GDP4S	Surface	60	120/240	4

Application:
GT series Load Centers have been designed for safe,reliable distribution and control of electrical power as service entrance equipment in residential,commercial and light industrial premised.They are available in Plug-in design for indoor applications..

Features:
1.Made out of high quality steel sheet of up to0.8-1.2mm thickness.
2.Matt-Finish polyester power coated paint.
3.Knockouts provided on all sides of the enclossure.
4.Accept Square D type plug-in circuit breakers.
5.Suitable for Single-Phase,Three-Wire,rated current to 100A,series voltage to 120/240Vac.120/240Vac.
6.Convertible to main breaker.
7.Flush and Surface mounted design.
8.Knocknuts for cable entry are provide Top,Bottom of the Enclosure.

GTLS Economy Load Centers



GTLS4-4WAY

Product Number	Front Type	Main Ampere Rating	Rated Voltage	No. of way
			V	
GTLS4-4WAY	Flush/Surface	40100	120/240	4

Application:
GTL series are ECONOMY Load Centers which can substitud some of the GTL series Load Centers.They have been designed for safe,reliable distribution and control of electrical power as service entrance equipment in residential,commercial and light industrial premised.

Features:
1.Made out of high quality steel sheet of up to0.8-1.2mm thickness.
2.Matt-Finish polyester power coated paint.
3.Knockouts provided on all sides of the enclossure.
4.Accept GE type 1" THQL breakers.
5.Suitable for Single-Phase,Three-Wire,rated current to 100A,series voltage to 120/240Vac.120/240Vac.
6.Convertible to main breaker.
7.Flush and Surface mounted design.
8.Knocknuts for cable entry are provide Top,Bottom of the Enclosure.

GT Series Load Centers



GTL412C




GTL612F/GTL812F

Product Number	Front Type	Main Ampere Rating	1"Spaces		1/2"Spaces	
			1 Pole	2 Poles	1 Pole	2 Poles
GTL412C	Combination	125	4	2	8	3
GTL612F	Flush	125	6	3	12	4
GTL812F	Flush	125	8	4	16	8

Application:
GT series Load Centers have been designed for safe,reliable distribution and control of electrical power as service entrance equipment in residential,commercial and light industrial premised.They are available in Plug-in design for indoor applications.

Features:
1.Made out of high quality Electro-galvanized steel sheet of up to 1.0-1.5mm thickness.
2.Matt-Finish polyester power coated paint.
3.Knockouts provided on all sides of the enclossure.
4.Accept GE's Q Line circuit breakers,including GE's exclusive 1/2" THQPs.
5.Suitable for Single-Phase,Three-Wire,120/240Vac,rated current to 225A.
6.Convertible to main breaker.
7.Flush and Surface mounted design.
8.Knocknuts for cable entry are provide Top,Bottom of the Enclosure.

BS4568, BS31
CONDUIT & ACCESSORIES

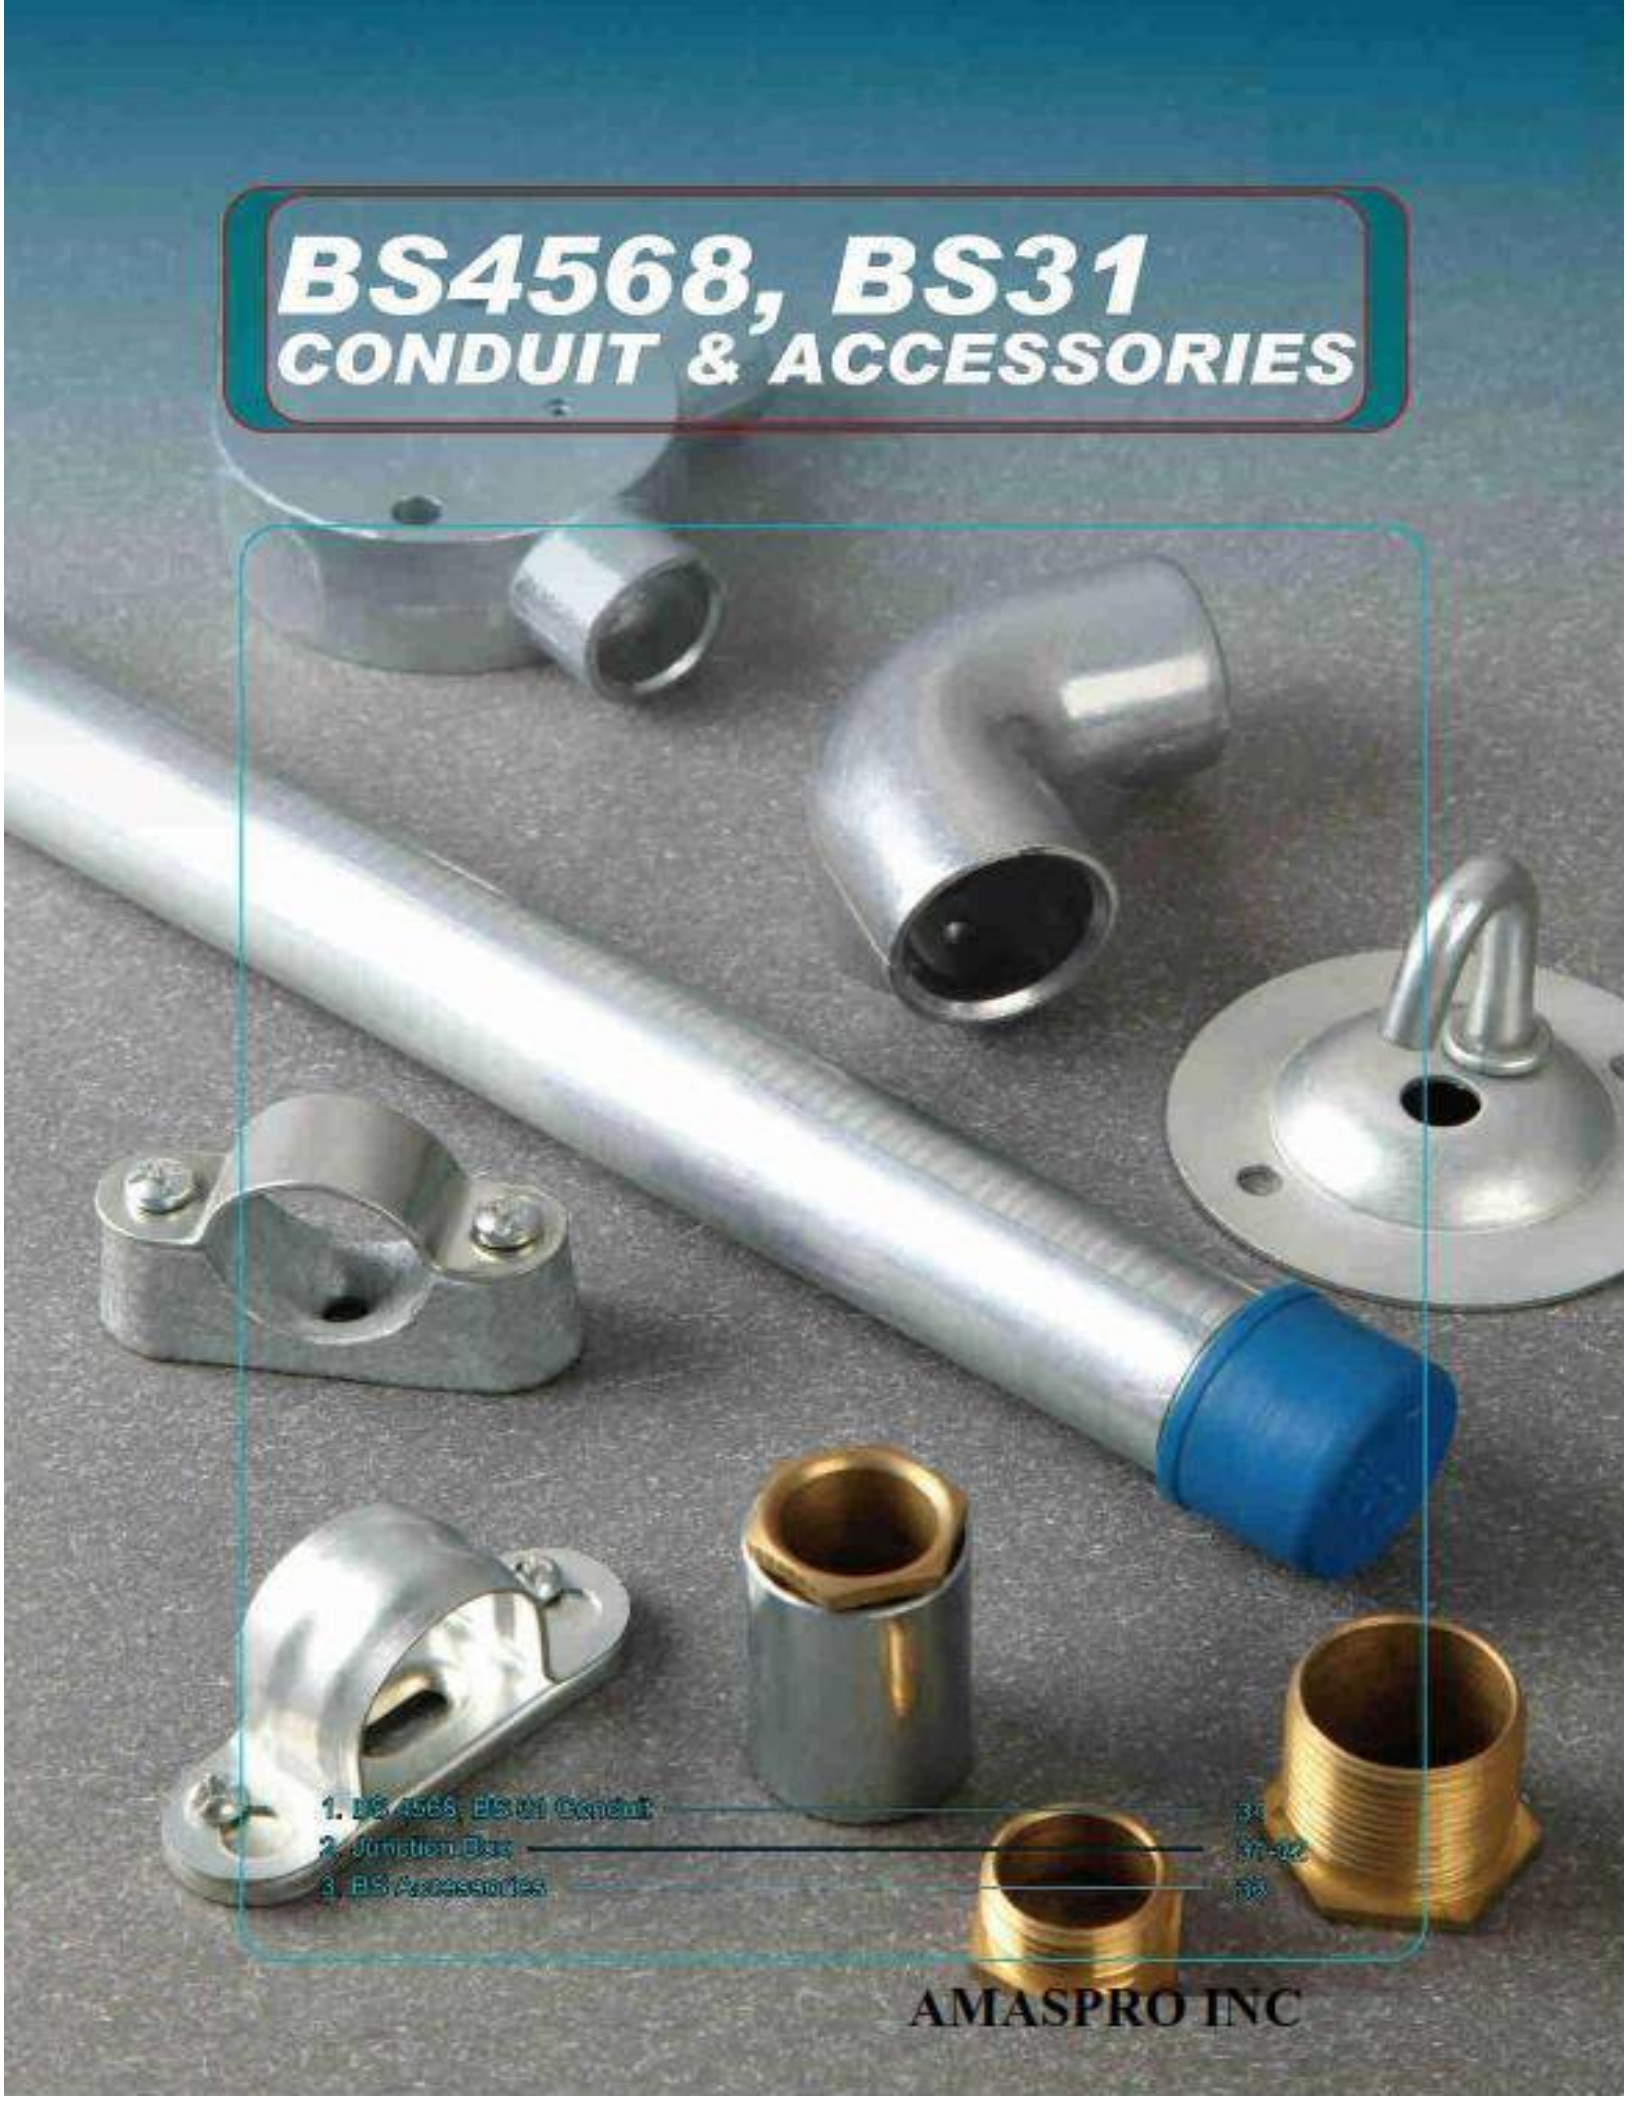

1. BS 4568, BS 31 Conduit 01
2. Junction Box 17-22
3. BS Accessories 23

AMASPRO INC

AMASPRO
America & Asia Products Inc

BS CONDUIT

BS4568, BS31 CONDUIT



	CAT#	Size	Outside Diameter		Thickness Of Wall 1	Thickness Of Wall 2	Length
	MM	MM	Min(MM)	Max(MM)	MM	MM	MM
STANDARD BS4568-1970	T-51	20	197.7	20	1.65	1.40	3750
	T-52	25	24.6	25	1.65	1.40	3750
	T-53	32	31.6	32	1.65	1.45	3750
	T-54	40	39.6	40	1.65	1.45	3750
	T-55	50	49.5	50	1.65	1.45	3750

	CAT#	Size	Outside Diameter	Thickness Of Wall 1	Thickness Of Wall 2	Length
	MM	MM	MM	MM	MM	MM
STANDARD BS4568-1970	T-61	3/4"	19.05	1.65	1.30	3810
	T-62	1"	25.4	1.65	1.30	3810
	T-63	1-1/4"	31.75	1.65	1.35	3810
	T-64	1-1/2"	38.1	1.65	1.40	3810
	T-65	2"	50.8	1.65	1.40	3810

JUNCTION BOX

Switch Boxes 16mm deep No.BB42A



CAT#	Type Of Entry	Fixing Lugs
One - Gang	1 oval hole fitted with rubber grommet and 3 oval KO's for grommet entry	1 fixed and 1 adjustable

Switch Boxes 16mm deep No.BB53A



CAT#	Type Of Entry	Fixing Lugs
Two - Gang	1 oval hole fitted with rubber grommet and 3 oval KO's for grommet entry	1 fixed and 1 adjustable

Switch and Socket Boxes 25mm deep No.BB62A



CAT#	Type Of Entry	Fixing Lugs
One - Gang	11x20mm KO's	2 fixed and 2 adjustable

Switch and Socket Boxes 25mm deep No.BB72A



CAT#	Type Of Entry	Fixing Lugs
Two - Gang	16x20mm KO's	1 fixed and 1 adjustable

Switch and Socket Boxes 35mm deep No.BB82A



CAT#	Type Of Entry	Fixing Lugs
One - Gang	11x20mm KO's	2 fixed and 2 adjustable

Switch and Socket Boxes 35mm deep No.BB92A



CAT#	Type Of Entry	Fixing Lugs
Two - Gang	14x20mm KO's	1 fixed and 1 adjustable

America & Asia Products Inc

CIRCULAR JUNCTION BOX

Aluminum Boxes	Material:Aluminum 60.3mm Internal Diameter 20mm Boxes Minimum 25mm Deep 25mm Boxes Minimum 25mm Deep Trapped M4at 50.8mm Centers With tappes hole in base for earthing scre Supplied without cover or fixing screws uniess ordered

Malleable Boxes	Material:Malleable Iron Finishes:Black Enamel,Galvanized 60.3mm Internal Diameter 20mm Boxes Minimum 25mm Deep 25mm Boxes Minimum 25mm Deep Trapped M4at 50.8mm Centers With tappes hole in base for earthing scre Supplied without cover or fixing screws uniess ordered

	Terminal No.BF181A Size:20mm 25mm		Terminal No.BF181 Size:20mm 25mm
	Through No.BF182A Size:20mm 25mm		Through No.BF182 Size:20mm 25mm
	Angel No.BF183A Size:20mm 25mm		Angel No.BF183 Size:20mm 25mm
	Tee No.BF184A Size:20mm 25mm		Tee No.BF184 Size:20mm 25mm
	Intersection No.BF185A Size:20mm 25mm		Intersection No.BF185 Size:20mm 25mm
	Channel Inspection Tee No.BF131A Size:20mm 25mm 32mm		Channel Inspection Tee No.BF131 Size:20mm 25mm 32mm
	Channel Inspection Elbow No.BF123A Size:20mm 25mm 32mm		Channel Inspection Elbow No.BF123 Size:20mm 25mm 32mm

AMASPRO
America & Asia Products Inc

BS ACCESSORIES



Distance Saddle No.BF363

Material:Aluminum Base.Steel Top
Finishes:Black Enamel,Galvanized
Size: 20mm 25mm 32mm 40mm 50mm



Spacer Bar Saddle No.BF431

Maretial:Steel
Finishes:Black Enamel,Galvanized
Size: 20mm 25mm 32mm 40mm 50mm



Normal Nipple No.BF107

Maretial:Steel
Size: 20mm 25mm 32mm 40mm 50mm



Clip (Half Saddle) No.BF441

Maretial:Steel
Finishes:Black Enamel,Galvanized
Size: 20mm 25mm 32mm 40mm 50mm



1 Way (Single) Saddle No.BF451

Maretial:Steel
Finishes:Black Enamel,Galvanized
Size: 20mm 25mm 32mm 40mm 50mm



BS31/BS4568 Coupler

Size1	Size2
	MM
1/2"	16
3/4"	20
1"	25
1-1/4"	32
1-1/2"	40
2"	50



Brass Male Bushing

Size1	Size2
	MM
1/2"	16
3/4"	20
1"	25
1-1/4"	32
1-1/2"	40
2"	50

America & Asia Products Inc

Competent quality,
creative team,
warm service ...

Directory

Office in Panama

People to Contact:	Emails:
Marco González-Gerente General	sales@amaspro.com – Gerencia
General César Rodríguez-Ventas Int.	sales1@amaspro.com – Ventas Int
Martin Castillero-Op. y Logistica	sales3@amaspro.com – Op. y Logistica
Elida Vega-Admon-Finanzas	contac1@amaspro.comAdmon-Finanzas
Dally Siles -Asistente Admon	sales2@amaspro.com – Asist.

Marketing Management in Costa Rica

People to Contact:	Emails:
Marco González-Gerente General	amasprocr@gmail.com – Gerencia
Yorleny Leiton -Ventas Int.	amasprocr1@gmail.com> – Ventas Int

Contact Offices Costa Rica

•(506) 2101-4485 •(506) 8674-2000 (celular) •(506) 8530-5252 (celular)

Contact us Headquarters

•(507) 277-4083 •(507) 277-4183 •(507) 277-4153
•(507) 277-4253 •(507) 277-4283 •(507) 392-3640 •(507) 392-7271

Website

www.amaspro.com