AMASPRO INC



AMERICA & ASIA PRODUCTS INC



- *Immediate processing of your requests*
- *Fast Dispatch*
- *Constant quality control of our products*

Address

Villa Lucre, Calle Las Palmeras, Boulevard Las Colinas Panama, Republic of Panama

DIRECTORY

Option 1

NEW PRODUCTS

New Products 001

Option 2

Packing Tape Series

Bopp Packing Tape 003
Color Packing Tape 004
Printed Packing Tape 005

Option 3

STATIONERY TAPE SERIES

Stationery Tape 007
Invisible Tape 008

Option 4

WASHI TAPES SERIES

Washi Tape 010
Masking Tape 011
Kraft Paper Tape 012
Double Side Tape 013-014

Option 5

INSULATING TAPE SERIES

Insulating Tape 016
Warning Tape 017
Pipe Warpping Tape 018
Cloth Tape 019
Aluminum Tape 020
Security Tape 021
Filament Tape 022

Option 6

Popular Packing For Super Market Series

Super Market 024-034

Option 7

Dispenser Series

Dispenser Series 035-043

New Products





-20ºC

Low Temperature Packaging Tape



Bag Sealing Tape



Laser Tape



Washi Tape

Packing Tape Series



Bopp Packing Tape



- Normal Packing Tape
- Low Noise Packing Tape
- Crystal Clear Packing Tape
- Low Temp Packing Tape

Description

Packing Tape is made with water-based acrylic adhesive on Bopp film. Various thickness tapes for different weight requirements. Available in a variety of widths, lengths and colors to meet your special needs.

Features

High adhesion; High tensile strength

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	Persistent Adhesion (Hours)	180°C Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
0.040	BOPP	Acrylic	36mm			20	>24Hs	>5.5	⩾75	<170	
0.045	BOPP	Acrylic	43mm	30Y	Transparent	22	>24Hs	>6.0	⩾75	<170	Packaging carton boxes with automatic sealing machine or by hand; Steadying & bondling; Low noise packing tape for good working place which require quiet; Crystal clear packing tape with good looking for Super market selling.
0.047	BOPP	Acrylic	45mm		Tan	22	>24Hs	>6.5	⩾75	<170	
0.050	BOPP	Acrylic	48mm	I	Chinese Tan	24	>24Hs	>6.5	⩾78	<170	
0.053	BOPP	Acrylic	50mm		Light Brown	26	>24Hs	>7.0	⩾78	<170	
0.065	BOPP	Acrylic	60mm	1500m	Dark Brown	26	>24Hs	>7.5	⩾110	<170	
0.070	BOPP	Acrylic	72mm			28	>24Hs	>8.0	⩾130	<170	
0.090	BOPP	Acrylic	75mm			28	>24Hs	>9.0	⩾190	<170	











Color Packing Tape



COLOR



Description

Color Tape is made with color water-based acrylic adhesive coated on Bopp films. 7 color variations available for sorting packages. Different region and cargoes can be assigned by different colors tape for rapid sorting purpose.


Features

Attractive color; High adhesion; High tensile strength

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	Persistent Adhesion (Hours)	180°C Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
0.045	BOPP	Acrylic	24mm 36mm 45mm 48mm 50mm 60mm 72mm 75mm	30Y I 1000m	Red Yellow Blue Green Orange Black White	20	>24Hs	6.0	⩾75	<170	Efficiently sorting and packaging in workshop and warehouse for production control; Easy for packaging image when variety of cargoes were massed together.
0.047	BOPP	Acrylic				20	>24Hs	6.5	⩾75	<170	
0.050	BOPP	Acrylic				20	>24Hs	6.5	⩾78	<170	
0.053	BOPP	Acrylic				22	>24Hs	7.0	⩾78	<170	
0.065	BOPP	Acrylic				22	>24Hs	7.5	⩾110	<170	





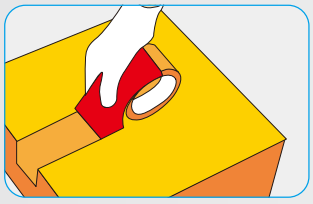



Printed Packing Tape


PRIORITY
FRAGILE
FRAGILE
FRAGILE



Stationery Tape Series

Stationery Tape



- Transparent
- Yellowish
- Reddish
- Rainbow
- Crystal clear

Rainbow



Description


Stationery tape is made with water-based acrylic adhesive coated on Bopp films, Applicable for general sealing, paper mending, fixing & splicing and gift wrapping, Easy-Tear is better and convenient to use without cutting machine at home, office and school. Available in variety of widths, lengths and colours to meet your special requirement.

Features

Easy-Tear

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	Persistent Adhesion (Hours)	180°C Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
0.038	BOPP	Acrylic	12mm 15mm 18mm 19mm 24mm	5Y	Transparent Yellow Reddish Rainbow	16	>8Hs	5	⩾75	<170	Suitable for art crafts & design, drawing; Sealing, jointing, Splicing and paper mending; Gift wrapping; Reinforcing documents.
0.040	BOPP	Acrylic		I		20	>24Hs	>5.5	⩾75	<170	
0.045	BOPP	Acrylic		60m		18	>24Hs	6.0	⩾75	<170	




Invisible Tape



Description



Invisible Tape is made with acrylic adhesive coated on special matte film. Writable on surface. Never show up when photocopying or faxing. It is ideal for drawing, office document book and magazine mending, splicing at home, school and office. Available in variety of widths, lengths and colours to meet your special requirement.

Features

Writable and non-reflective surface; Easy tear

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	180℃ Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
0.050	Matte Bopp	Acrylic	12mm 15mm 18mm 19mm	10Y-33M	White	4	⩾75	<170	Specially sealing,jointing; Splicing and mending paper, book and magazine; Reinforcing documents.

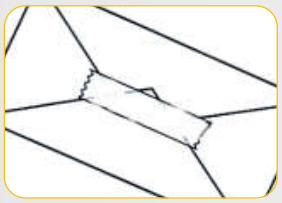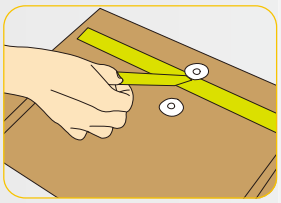

WASHI TAPE



AMASPRO INC



Washi Tape



Description

Washi Tape is for specifications decorating, card making, fancy for gift packaging, and DIY decoration for art working ect.

Features

1. Various designs and coloful;
2. No residue, safety hand tear;
3. Soft and thin paper.

Thickness(mic)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Persistent Adhesion (Hours)	180°C Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
100	Wasjo Tape	modified starch	12mm 15mm 18mm	10m--50m	Red Yelleow Green Orange Rainbow Etc	⩾15Hs	⩾4.5	----	----	Specifications decorating for gift box packing.






Masking Tape



General Purpose Masking Tape

Description

General purpose grade making tape is made of crepe paper which is coated with rubber adhesive, Widely used for holding, bundling, sealing and non-critical masking application.

Features

Printable; Writable as pad paper; No adhesive residue; Good retractability; Smooth trimmed edges.

Thickness(mm)	Temperature Resistance (° c)	Backing	Adhesion Type	Width Standard	Length Standard	Adhesion To Steel (N/in)	Tensile Strength (N/in)	Usage
0.125	60	Creped paper	Rubber	12mm 18mm 24mm 36mm 48mm 60mm 72mm	20m-50m	>6.0	>80	Sealing of joints between windows, doorframes and walls;Masking of surfaces during spraying, painting, lacquering and plastering ;Flower bundling
0.135	80					>7.5	>85	



Medium Temperature Masking Tape

Description

Professional grade masking tape is used in medium temperature for painting & spraying cars, trucks during paint repair. Available in variety of width, length to match your special requirement. It can withstand paint over bake cycle up to 80-120°C for up to 30 minutes. Available in variety of widths and lengths for specific needs.

Features

Low initial adhesion and good holding power.

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Adhesion To Steel (N/in)	Tensile Strength (N/in)	Elongation (%)	Temperature Resistance	Usage
0.15	Creped paper	Rubber	6mm-48mm	50m	>8	>90	10	80 c-120 c	Car painting protection in high temperature; Painting over baking system.

General Purpose Masking Tape | Medium Temperature Masking Tape











Kraft Paper Tape



Description

Kraft Paper Tape is made with rubber -based adhesive coated on kraft paper. Available in writable and unwritable varieties for different applications. It is more preferred for meeting recycling requirements. Printing "WARNING" , "CAUTION" , "FRAGILE" etc on the tape can remind carriers to handle cartons carefully to ensure package integrity. Also seals, protects and secures your transport packages with easy-to-recognized message. Available in variety of widths, lengths and some printing design to meet your special requirement.

Features


Printable; Teared by hand and Low Noise for packing; Non-deterioration and non-distortion;
Free of pollution, burnable and recyclable.

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	Persistent Adhesion (Hours)	180°C Peeling Strength (N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
0.130	Kraft Paper	Rubber	24mm 36mm 48mm 50mm 60mm	30m-100m	Tan	18	>10Hs	6.0	⩾85	<20	Correcting shipping mark; Print on customized information.

Kraft Paper Tape





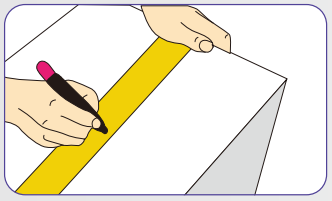



Double Side Tape



Tissue Double Side Tape

Description

Use tissue as carrier, coated with hot melt adhesive, Laminated on double-side silicone release liner. Widely used for decoration, in the postal service, and for joining light weight items in offices and homes, also applying shoe & leather industry for long-term mounting & fixing. Available in variety of widths and lengths for your special requirement.

Features

Double side stickiness; High adhesion; Easy tear.



Cloth-based Double Side Tape


Description

Cloth Double Side Tape is made of cotton cloth material and hot melt adhesive. Available in variety of widths, lengths and white/yellow protective liner for specific needs, designed for special environment in industry, commerce and family etc.

Features

High tech. double stickiness; Easy tear; Anti harsh surface.

Item Number	Adhesion Type		Backing	Standard Specification		Adhesive Content g/m2	Adhesion to steel (N/in.)	180°C Peeling Strength (N/in.)	Persistent Adhesion (Hs)	Elongation (%)	Usage
N	M		M	Width(mm)	Length(y)	C	steel	S	P	E	
Tissue d/s tape	hot melt	35mesh	Tissue	9mm-48mm	10y-30y	80g	14	⩾16N	⩾2Hs	3.0	Adhere documents, public notes; Sealing envelopes; Fixing photos or any sheet items; Decoration and creative action; Gift wrapping.
		70mesh				90g		⩾18N			
Cloth d/s tape	combined rubber 70mesh		Cloth			240g	10	⩾10N	⩾4Hs	3.0	Designed for decorating & construction industry; Carpet jointing & fixing; Fixing lamination; Specially for rough surface fixing.
						280g	32	⩾14N			
						250g	20	⩾12N			
Tissue Double Side Tape						Cloth-based Double Tape					

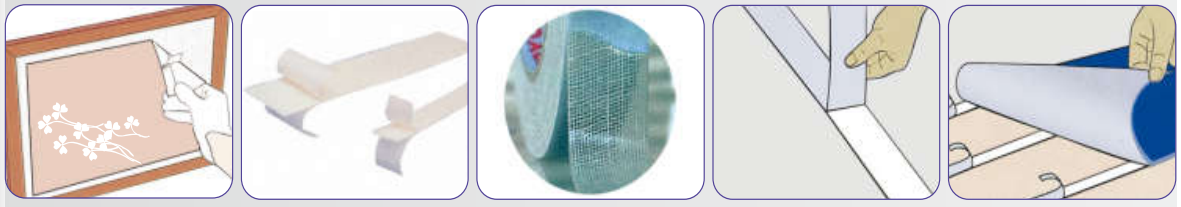

Double Side Tape



PP/PET Double Side Tape

Description

Made of PP/PET material and hot melt adhesive. Commonly used in PVC floor carpet installation. Available in variety of widths, lengths and white/yellow protective liner for your special requirements.

Features

Strong adhesion; Double stickiness; High tensile strength; Anti-acid; Good moisture resistance.



Foam Double Side Tape

Description

Foam Double Side Tape is made of foam material and hot melt adhesive. Available in variety of widths, lengths, colors and white/yellow/green protective liner for specific needs. Supplying EVA, sponge backing material.

Features

Very strong adhesion; Good mitigating vibratilyty; Strong crack resistance.

Item Number	Backing	Standard Specification		Adhesive Content g/m2	Adhesion to steel (N/in.)	Persistent Adhesion (Hs)	Usage
N		Width(mm)	Length(y)		steel	P	
PP/PET d/s tape	PP/PET	9mm-48mm	20y-50y	100	16	24Hs	Fixing and jointing PVC floor carpet; Fixing heavy item; Construction and decoration industry; Reinforcing bonding.
Foam d/s tape	Eva Foam/PE		1y-6y	100	16	24Hs	Fixing permanently; Used in irregular surface; Mounting decorative objects in cars, machines and houses; Sticking heavy item.
PP/PET Double Side Tape				Foam Double Side Tape			





INSULATING TAPE

Insulating Tape



PVC Insulating Tape

Description

PVC Insulating Tape is made from soft polyvinyl Choride(spc) as the backing material, which is coated with rubber pressure-sensitive adhesive. Good resistant to high voltage, temperature, moisture and flame. Common pvc insulation tape is widely used for connecting separate electrical wires, electrical insulating and protection applications. Color strip tape with two color for warning purpose. Available in variety of widths lengths and colours to meet your special requirement.

Features

High voltage, moisture resistance, Flame retardant.

Car Insulating Tape

Description

Car Insulating Tape is made from flame retardant spvc as the backing material, which are coated with rubber pressure-sensitive adhesive. Good resistant to high voltage, temperature, moisture and flame. Commonly used for automobile harness, insulation protection, electrical equipment, refrigerators and electronic apparatus. Available in variety of widths, lengths and colours to meet your special requirement.



Features

Environmentally friendly and Non toxic; Flexibility with strong retractability; Strong tensile strength; High voltage, moisture resistance; Flame retardant; Weather-resistance; Non-deteriorating.

Item Number	Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Withstand Voltage (KV)	Temperature(°c)	180° c Peeling strength(N/in.)	Tensile Strength (N/in.)	Elongation (%)	Usage
Pvc insulating tape	0.11	PVC	Rubber	15mm I 48mm	5m I 20m	Red Yellow Black Blue Green White	5.5	80	3.8	38	160	Electrical wire wrapping, connecting, insulating and repair; Electronic industry; Cables repair, wrapping and bondling; Cables reinforcing and protecting.
	0.13	PVC	Rubber				5.5	80	3.8	43	160	
	0.15	PVC	Rubber				6.5	80	3.8	50	160	
	0.18	PVC	Rubber				8	80	3.8	65	160	
Col.Strip tape	0.16	PVC	Rubber				6.5	80	3.8	55	160	
CP15080	0.15	PVC	Rubber	15mm I 48mm	9m I 20m	Red Yellow Black Blue	6	80	4	55	160	Automobile wire insulating, wrapping and protection; Electrical repair; Electronic industry; Cables repair, wrapping and bondling; Cables reinforcing and protecting.
CP18080	0.18	PVC	Rubber				8	80	4	70	180	
CP150150	0.15	PVC	Rubber				6	105	4	55	200	
CP180150	0.18	PVC	Rubber				8.5	105	4	70	200	
PVC Insulating Tape							Car Insulating Tape					









Warning Tape

MOQ for each col:5000 Square meters





Description

Warning Tape is made from spvc as the backing material, which are coated with rubber based adhesive. Attractive col strip and highly eye-catching. Widely used as hazard warning, section segregating and lane marking. Available in variety of widths, lengths and colors to meet your special requirement.

Features

Attractive color; Excellent flexibility; Strong adhesive; Anti-abrasion and anti-corrosion; Weather-resistant.

Item Number	Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	180° c Peeling strength (N/in.)	Tensile Strength (N/in.)	Elongation(%)	Temperature (° c)	Usage
WN130	0.13	PVC	Rubber	48mm 50mm	25mm I 50mm	White/Red White/Green Yellow/Black	3.8	45	150	80	Hazard warning; Sealing and identifying; Lane marking; Section segregating; Car parking section marking.
WN150	0.15	PVC	Rubber				3.8	50	150	80	
WN170	0.17	PVC	Rubber				3.8	80	170	80	









Pipe Wrapping Tape




Description

Pipe Wrapping Tape is made from spvc as the backing material, which is coated with rubber based adhesive. Good resistant to moisture, humidity, corrosion and temperature variations. Widely used in industrial applications to protect air, water, oil and steam pipes installed underground or on the surface from corrosion and abrasion damage. Supplying embossed film for easy tear and shiny film. Available in variety of widths, lengths and colours to meet your special requirement.

Features

Excellent flexibility; Strong tensile strength; Anti-abrasion and anti corrosion; Good resistance to oil, chemical and moisture; Weather-resistance; Non-deteriorating.

Type	Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	180° c Peeling strength (N/m.)	Tensile Strength (N/m.)	Elongation(%)	Usage
PVC Pipe Wrapping Tape	0.18	PVC	Rubber	48mm 50mm	15mm I 50mm	BlacK Gray Tan	3.8	63	160	For industrial use; Various pipe wrapping; Protect them from water, oil, abrasion and any chemical.
	0.20	PVC	Rubber				3.8	65	180	
	0.25	PVC	Rubber				3.8	70	200	
	0.30	PVC	Rubber				3.8	80	200	




Cloth Tape



MOQ per colour:5000 Square meter

Description

Cloth Tape is made of Polyethylene, fabric reinforcement, synthetical backing which is coated with combined rubber adhesion. Widely used for carpet jointing, book and file mounting protection. Available in variety of width, length and colours for your special requirement.


Features

Strong & Steady adhesion; Easy tear; High anti-strain; Humidity resistance.

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	180℃ Peeling Strength (N/m.)	Tensile Strength (N/m.)	Elongation (%)	Usage
170mic	35mesh	combined rubber base	24mm 36mm 48mm 50mm 60mm 72mm	6m-50m		<5	⩾10	⩾83	25	Carpet jointing and affixing; Booking bindling; File classified; Handle anti-slip.
190mic	70mesh					<5	⩾12	⩾100	25	
250mic	Cloth (70mesh)					<5	>14	⩾125	25	
280mic						<5	>14	⩾125	25	





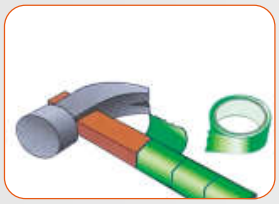



Aluminum Tape




Description

Aluminum Tape is made of aluminum foil which are coated which combined rubber adhesive. Excellent resistance to moisture, dust, corrosion, any chemical and temperature variations. Heat & light reflectance. Flame retardant, Widely used in industry to protection of air pipe, water pipe, oil pipe and steam pipe indoor or outdoor from corrosion, dissipating heat and abrasion. Available in variety of widths, lengths to meet your special requirement.

Features

Excellent resistance to moisture, oil, chemical, dust; Good for harsh, long-term outdoor applications; Anti-abrasion and anti corrosion; Flame retardant; Heat & light reflectance; Weather-resistance; Non-deteriorating.

Thickness(mm)	Backing	Adhesion Type	Width Standard	Length Standard	Color	180° c.Peeling strength (N/in.)	Tensile Strength (N/in.)	Persisting Adhesion (Hs)	Usage
0.05	Aluminum Foil	Combined Rubber	47mm	20m I 50m	Silver	7.5	15	12	For industrial use; Various pipe wrapping to protect them from heat, water, dust, abrasion and any chemicals; Wrapping tubes for connection purpose; Used on harsh surface indoor or outdoor for long term application.
0.065			48mm			8	18	24	
0.08			50mm			10	20	24	

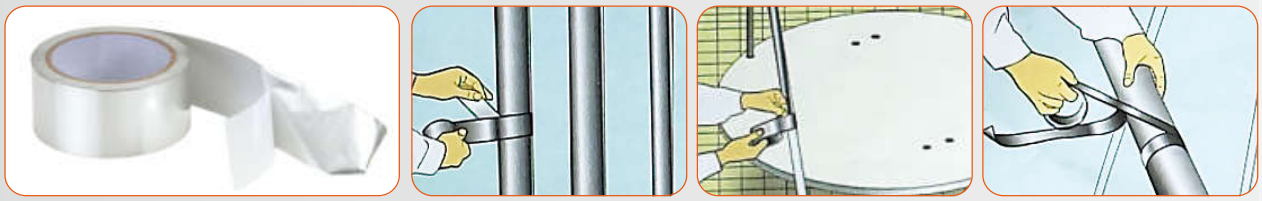

Security Tape



Description

It is made with the most advanced anti-counterfeit technology in the world, which involves very complicated manufacturing process and makes 100% anti-counterfeiting possible preset pattern or hidden message or color-charge anti-counterfeiting with show up when tape is peeled or attempts are made at removing it with heat or cold. Available in variety of widths, lengths, colors and private design.

Features

Temper evident, self-wound, self-voiding; Warming message printing; Invisible hidden warning message; Non-recoverable permanent sealing; Identified easily; One time use, anti-juggle, anti-deny; Special message/graphics available; Writable, processable, anti-fake and quality stability.

Thickness(mm)	Backing	Adhesion Type	Release Liner	Width Standard	Length Standard	Peeling Strength (N/in.)	Persistent Adhesion (N/in.)	Usage
0.05	PET(25mic)	Acrylic	80mic glassine release paper/PET	30mm 48mm 50mm 60mm	10m-100m	1.12	N/A	Prevent labels and stickers from being reused; Prevent packages or boxes from being opened, replaced or stolen; Prevent documents, letters or parcels from unauthorized opening or reading; Improve product image and raise customer's confidence on products; For Education, Bank, Customer & Finance Department; For quality warranty.









Filament Tape





Description

Filament tape (Fiberglass Tape) is made of reinforced fiberglass backing in mesh or in straight-line and high quality hot melt adhesive. Very strong tensile strength, Not easy to break. Best packing solution in the most economical way, widely used in packaging of metallic or wooden furniture and fixing parts of electrical appliances or any heavy machines. It is available in variety of widths, lengths and straight-liner fiberglass backing or mesh fiberglass backing to meet your special requirement.

Features

High adhesion; Very strong tensile strength; High resistance to abrasion and moisture.

Article Number	Backing	Adhesion Type	Width Standard	Length Standard	Color	Initial Adhesion #steel ball	Persistent Adhesion (hours)	180° c Peeling strength (N/in.)	Tensile Strength (N/in.)	Elongation(%)	Usage
FB-01	Straight-line Fibreglass	High quality hotmelt	24mm 36mm 48mm 50mm 60mm	20m-100m	Clear	20	>10Hs	18	500	<20	Packagings of metallic or wooden furniture; Fixing parts of household electrical appliances such as fixing the door of refrigerators/ washingmachines etc; Steadying & bondling heavy duty packaging; Fixing parts of office machines.
FB-02	Mesh Fibreglass					20	>10Hs	18	790	<20	

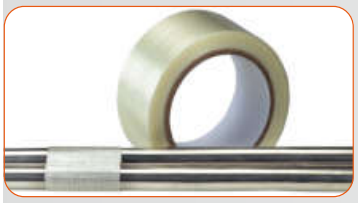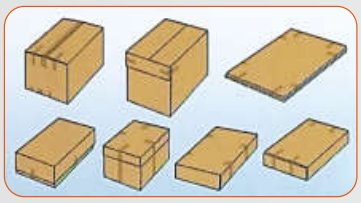

AMASPRO CONTACT DIRECTORY

Office in Panama

People to Contact:	Emails:
Marco González-Gerente General	sales@amaspro.com – Gerencia General
César Rodríguez-Ventas Int.	sales1@amaspro.com – Ventas Int
Martin Castillero-Op. y Logistica	sales3@amaspro.com – Op. y Logistica
Elida Vega-Admon-Finanzas	contac1@amaspro.com – Admon-Finanzas
Dally Siles -Asistente Admon	sales2@amaspro.com – Asist.

Contact us Headquarters

•(507) 277-4083 •(507) 277-4183 •(507) 277 -4153
•(507) 277-4253 •(507) 277 -4283 •(507) 392-3640 •(507) 392-7271

Marketing Management in Costa Rica

People to Contact:	Emails:
Marco González-Gerente General	amasprocr@gmail.com – Gerencia
Yorleny Leiton -Ventas Int.	amasprocr1@gmail.com> – Ventas Int

Contact Offices Costa Rica

•(506) 2101-4485 •(506) 8674-2000 (celular) •(506) 8530-5252 (celular)