AMASPRO INC



PROFESSIONAL OF SCREWS

PROFESIONAL DE TORNILLOS

To Be Your Reliable Screw Supplier !

AMASPROINC. an excellent supplier, our mission is to serve customers in different cities, our endeavor is to learn more about their needs and offer high quality screws with a better and competitive service




AMASPRO INC

Introduction/Introducción

01 Company Info
02 Production Process
03 Screw Data
04 Hex Washer Head Self Drilling Screw
05 Particle Board Screw
06 Drywall Screw
07 Modified Truss Head Screw
08 Self Tapping Screw &Machine Screw
09 Bugle Head Self Drilling Screw
10 Flat &Pan Head Self Drilling Screw
11 Self Drilling Screw with Wings
12 Hex Flange Head Screw
13 Chipboard screw
14 Hex Lag Screw &Wood Screw
15 Cement Board Screw &Concrete Screw
16 Sandwich Panel Screw
17 Farmer Screw, Head Coating
18 Wood Construction Screw
19 Other Fasteners
20 Other Fasteners

AMASPRO INC

Screw Production Process

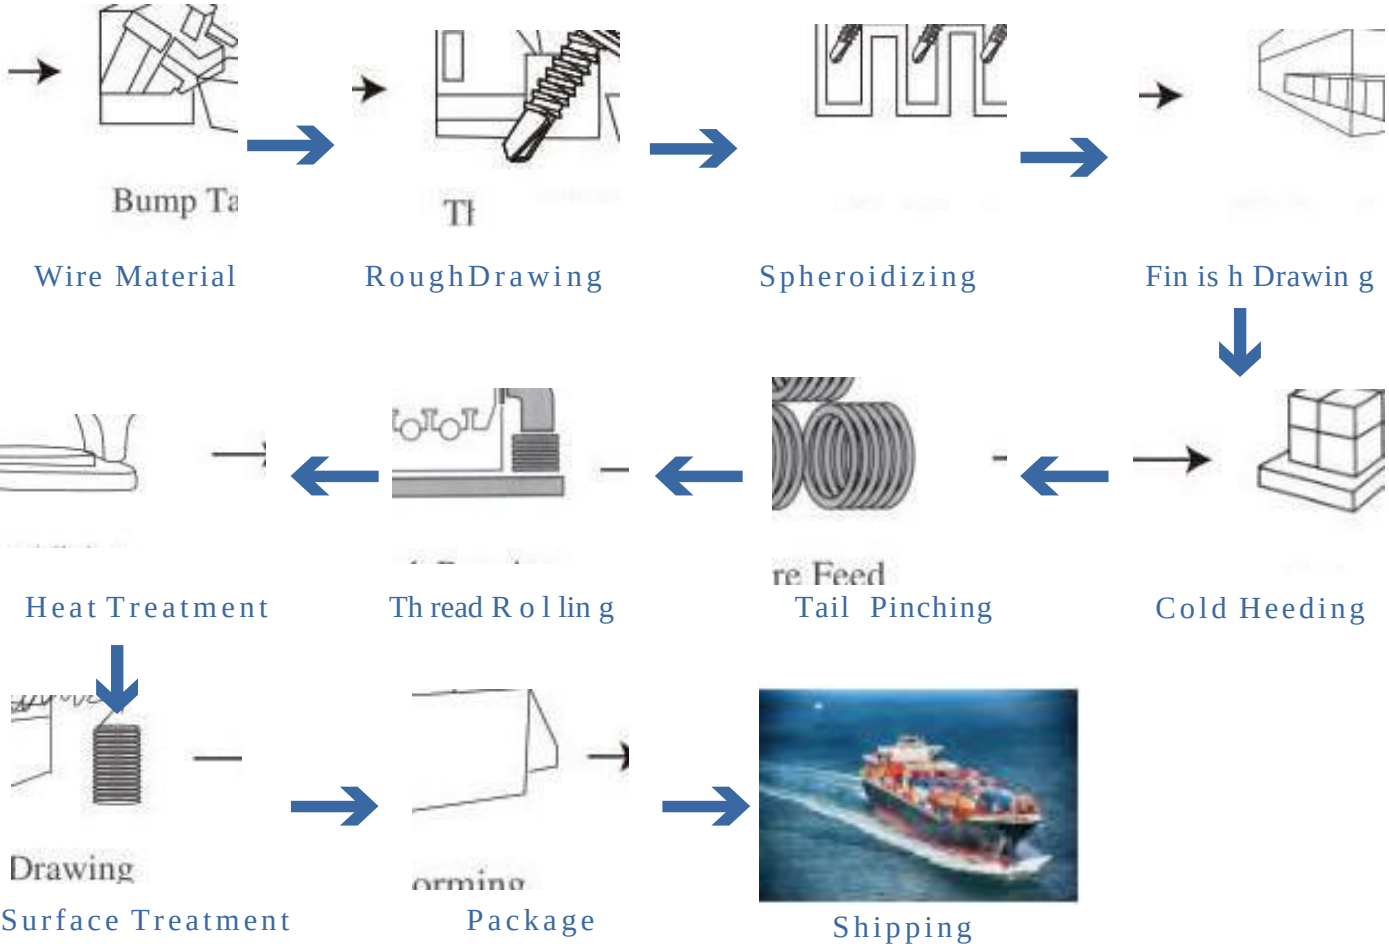

Screw Data


Head Styles



Head Recess



Threads

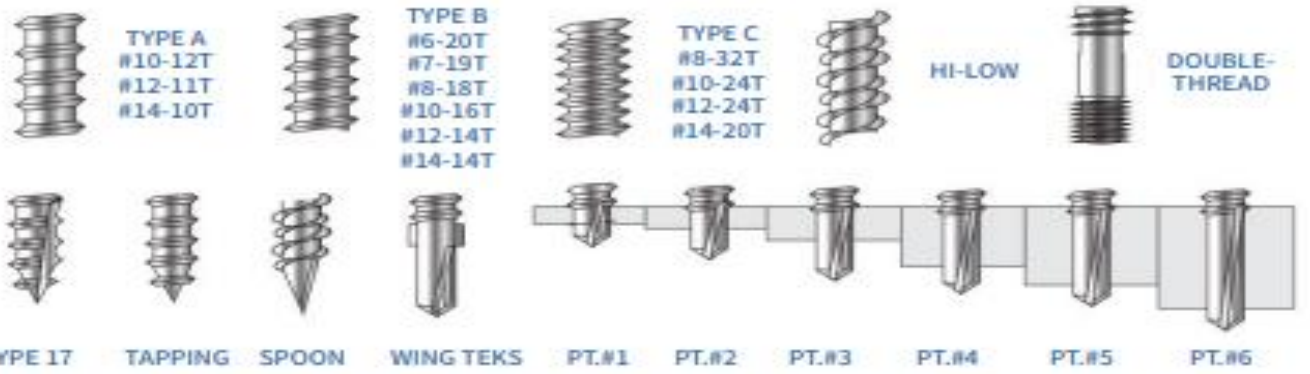

Drive Style



AMASPRO INC

Tornillo Hexagonal Punta de Broca
Indent Hex Washer Head Self Drilling Screw

Fastening Metal to Metal
For Roofing, Steel Stud Framing, Panel and others

Specification	Head	Drive	Material	Finish	Point
ASME, SAE, DIN According to customer's drawing and samples	Indent Hex Washer	Hexagon/ Slot/Phillips	Carbon Steel Hardened	ZincPlated/ Ruspert/ Others	#3Drill Point




Size	Length
#8(M4.2)	1/2''~6'' (13mm~150mm)
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	



Package: Bulk/Small box/Plastic Bag

With Black Rubber bonded steel washer
Con Rondana de Neopreno

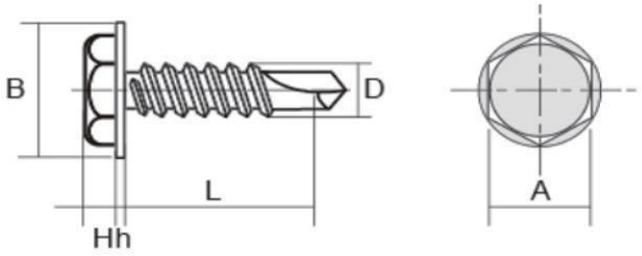



AS Standard

Size	B mm	A mm	h mm	H mm
#8	8.18 - 8.84	6.19 - 6.35	0.48 - 0.79	2.44 - 2.79
#10	9.75 - 10.51	7.74 - 7.92	0.48 - 0.79	2.67 - 3.05
#12	10.11 - 10.97	7.74 - 7.92	0.56 - 0.99	3.53 - 3.94
#14	12.19 - 13.21	9.32 - 9.52	0.76 - 1.27	4.37 - 4.83

DIN Standard

Size	B mm	A mm	h mm	H mm
M4.2	8.20 - 8.80	6.78 - 7.00	0.90	4.00 - 4.25
M4.8	8.80 - 10.50	7.78 - 8.00	0.90	4.15 - 4.45
M5.5	10.00 - 11.00	7.78 - 8.00	1.00	5.15 - 5.45
M6.3	12.20 - 13.20	9.78 - 10.00	1.00	5.65 - 6.45

Tornillo con Nibs para Madera
Particle Board Screw

Fastening materials of particle board/ OSB/ MDF

Specification	Head	Drive	Material	Finish	Point
ASME, DIN According to customer's drawing and samples	Flat Head with Nibs	Phillips/ Square/ Phillips+Square Combination	Carbon Steel Hardened	Black Phosphated / Zinc Plated/ ROusthperst/	Sharp/ Type 17

Size	Length
#6(M3.5)	1/2''~6'' (13mm~150mm)
#8(M4.2)	
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag



Type 17 Point



Hinge Screw

Using for drawer slides, hinges and other cabinet accessories

Popular Size	
#6x1/2''	#8x5/8''
#6x3/4''	#8x3/4''
#6x5/8''	#8x1''



Bright Brass Antique Brass Nickle

AMASPRO INC

TornillosparaTablaroca
Drywall Screw

Mainly used for the installation various plasterboard, gypsum, lightweight walls and ceilings.

Specification	Head	Drive	Material	Finish	Thread
ASME,DIN Accordingto customer's drawing and samples	Bugle Head	Phillips	Carbon Steel Hardened	Black/Grey Phosphated, Zinc plated/ Ruspert/Others	Coarse/ Fine

Size	Length
#6(M3.5)	1/2''~6'' (13mm~150mm)
#7(M3.9)	
#8(M4.2)	
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag



Coarse Thread
Rosca Gruesa



Fine Thread
Rosca Fina

Fine thread





Size	D	A	K	TORQ kg-cm
#6	3.40-3.60	7.90-8.30	0.50-0.80	Min28
#7	3.80-4.00	7.90-8.30	0.50-0.80	Min35
#8	4.10-4.30	7.90-8.30	0.50-0.80	Min45
#10	4.80-5.00	8.80-9.40	0.80-1.00	Min65

Coarse thread





Size	D	A	K	TORQ kg-cm
#6	3.50-3.90	7.90-8.50	0.50-0.80	Min28
#7	3.80-4.20	7.90-8.50	0.50-0.80	Min35
#8	4.20-4.60	7.90-8.50	0.50-0.80	Min45
#10	4.90-5.35	8.80-9.40	0.80-1.00	Min65

Tornillo K-LATH
Modified Truss Head Screw

Fasteni ng L ath to lig ht g aug e m etal or w ood


Specification	Head	Drive	M aterial	Finish	Point
ANSI, IFI, DIN According to customer's drawing and samples	Modified Truss Head (K-Lath)	Phillips	Carbon Steel Hardened	Blue White Zinc Plated/ Black Phosphated	#2 Drill Point/ Sharp point




Size	Length
#8(M4.2) #10(M4.8)	1/2''~3'' (13mm~76mm)



Package: Bulk/Small box/Plastic Bag

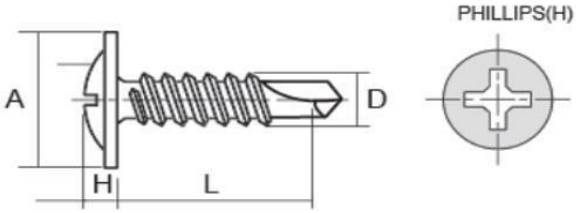

Size	D mm	A mm	H mm	TORQ kg-cm
#8	4.00-4.30	10.50-11.00	2.5	Min 38

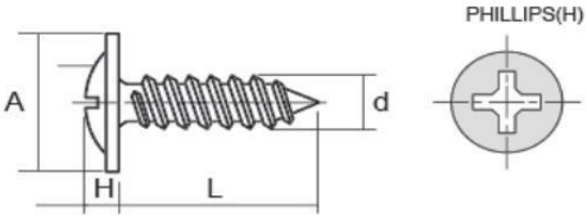

Size	D mm	A mm	H mm	TORQ kg-cm
#8	4.05-4.30	10.30-11.00	2.1-2.4	Min 33

AMASPRO INC

Tornillo Lamina
Self Tapping Screw

Fastening metal sheet to metal sheet orplastic, aluminum, wood, or hard rubber

Specification	Head	Drive	Material	Thread Type	Finish
ASME,DIN Accordingto customer'sdrawing andsamples	Pan head/ Flathead/ Indented Hexwasher head	Phillips/Slot / Slot+Phillips combination	Carbon Steel Hardened	Type AB, TypeA, TypeB	BlueWhiteZinc Plated/Black Zipnicated/Others

Size	Length
#4(M2.5)	3/8''~6'' (9.5mm~150mm)
#6(M3.5)	
#8(M4.2)	
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag



Hex Washer Head
Cabeza de hexagonal



Pan Head
Cabeza deFijadora



Flat Head
Cabeza de Plana

Tornillo de la Máquina
MachineScrew

Used to connect metal components in appliances, electronic devices, tools, vehicles, and machines ofevery type

Specification	Head	Drive	Material	Finish
ASME, SAE, ANSI, DIN Accordingto customer'sdrawing andsamples	Pan/Flat Head	Phillips/Slot / Slot+Phillips combination	Carbon Steel	Zinc Plated/Others

Size	Length
#4~5/16" (M2.5~M8)	1/2''~6'' (13mm~150mm)

Package: Bulk/Small box/Plastic Bag



Flat Head
Cabeza Plana



Pan Head
Cabeza Redonda


Tornillo Cabeza de Corneta Punta de Broca
Bugle Head Self Drilling Screw



Fastening wood to metal
Usinginflatsurfacerequired

Specification	Head	Drive	Material	Finish	Point
ASME, ANSI, IFI, DIN According to customer's drawing and samples	Bugle Head	Phillips	Carbon Steel Hardened	Zinc Plated/ Black Phosphated/ Ruspert/Others	#2, #3 drill point

Size Capacity	Length inch	Length mm	Drill Point	Drill mm
#6 M3.5	1''	25	#2	0.5-1.0
	1-1/4''	32	#2	0.5-1.0
	1-1/2''	38	#2	0.5-1.0
	2''	50	#2	0.5-1.0
#8 M4.2	1''	25	#3	1.0-2.0
	1-1/2''	38	#3	1.0-2.0
	2''	50	#3	1.0-2.0
	2-1/2''	65	#3	1.0-2.0
	3''	75	#3	1.0-2.0

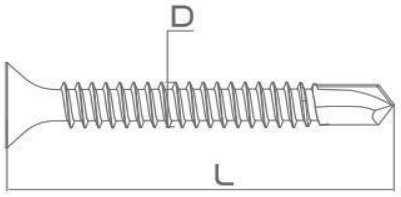

Package:Bulk/Small box/Plastic Bag


Tornillo de Framer Punta de Broca
Pan Framing Head Self Drilling Screw



Fastening Light Duty Aluminum and Steel

Specification	Head	Drive	Material	Finish	Point
ANSI, IFI, DIN According to customer's drawing and samples	Pan Framing Head	Phillips	Carbon Steel Hardened	Blue White Zinc Plated/Black Phosphated	#2 drill point

Size	Length inch	Length mm
#6 M3.5	7/16''	11
#7 M3.9	7/16''	11

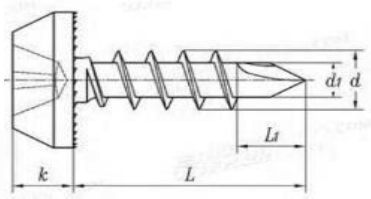

Package:Bulk/Small box/Plastic Bag

Tornillo Cabeza Plana Punta de Broca
Flat Head Self Drilling Screw

Fastening on windows or door frame
Using in flat surface required

Specification	Head	Drive	Material	Finish	Point
ASME, SAE, DIN According to customer's drawing and samples	Flat head	Phillips	Carbon Steel Hardened	Zinc Plated/ Ruspert/Others	#2, #3 drill point

Size	Length
#6(M3.5)	1/2''~6'' (13mm~150mm)
#8(M4.2)	
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag



Tornillo Cabeza Fijadora Punta de Broca
Pan Head Self Drilling Screw

Fastening sheet to steel, steel frame construction

Specification	Head	Drive	Material	Finish	Point
ASME, SAE, DIN According to customer's drawing and samples	Pan Head	Phillips	Carbon Steel Hardened	ZincPlated/ Ruspert/ Others	#2, #3 drill point

Size	Length
#6(M3.5)	1/2''~6'' (13mm~150mm)
#8(M4.2)	
#10(M4.8)	
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag




Tornillo Punta de Broca con Wings
Self Drilling Screw with Wings

Fastening wood, plywood to steel studs
Nibs under head clamp board firmly
Wingsream a hole in the wood to prevent thread engagement
and break away when self-tapping into metal

Specification	Head	Drive	Material	Thread Type	Finish	Point
ANSI, IFI, DIN According to customer's drawing and samples	Flat head with 6nibs/ Large wafer head with 8nibs	Phillips	Carbon Steel Hardened	Type BSD, Type CSD	Zinc Plated/ Ruspert/Others	#3 drill point

Size	Length
#10(M4.8)	1''~4'' (25mm~100mm)
#12(M5.5)	
#14(M6.3)	

Package: Bulk/Small box/Plastic Bag

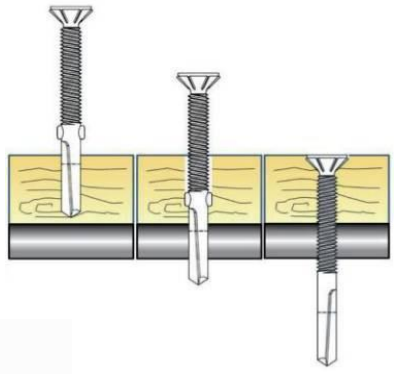



Large wafer head
Cabeza Oblea Grande



Flat head
Cabeza Plana

AMASPRO INC


TornilloHexagonalPuntaEspada
Hex Flange Head Spoon Point with Black Rubber

Fastening sheet metal to wood
Silver ruspert coating provides excellent protection from corrosion

Specification	Head	Material	Finish	Point
ANSI, DIN According to customer's drawing and samples	Hex Flange head with black rubber	Carbon Steel Hardened	Sliver Ruspert Coating/Others	Spoon point



Size	Length inch	Length mm
#10-12 M4.8	3/4''	19
	1"	25
	1-1/2"	38
	2"	50
	2-1/2"	65
	3"	75

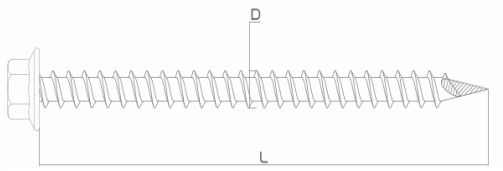

Package: Bulk/Small box/Plastic Bag


Hex Flange Head Self Drilling Screw
with Black Rubber

Using for steel panel to steel material connection
Drill capacity 5.0mm steel material
Silver ruspert coating provides excellent protection from corrosion

Specification	Head	Material	Thread	Finish	Point
ANSI,SAE, DIN According to customer's drawing and samples	Hex Flange head with black rubber	Carbon Steel Hardened	Double Thread, Straight Knurls on Flank	Sliver Ruspert Coating/Others	#3 drill point




Size	Length inch	Length mm	Drill Point	Drill Capacity mm
#12-14 M5.5	1-1/2"	38	#3	2.0-4.0
	2"	50	#3	2.0-4.0
	2-1/2"	65	#3	2.0-4.0
	3"	75	#3	2.0-4.0

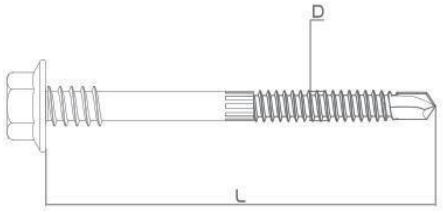


Package: Bulk/Small box/Plastic Bag

Tornillos para Chipboard
Chipboard Screw

Fasteni ng low , m edium or hig h density of chipboa rd, w ood and m etal sheet. Mainly used in furniture manufacturing, cabinets, and other fields.

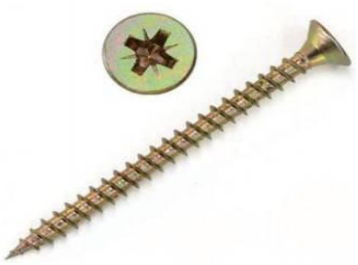

Specification	Head	Drive	M aterial	Finish
DIN7505A Accordingto customer'sdrawing and samples	Double flat head/Flat head	Pozi/ Phillips/Torx	Carbon Steel Hardened	Zinc Plated

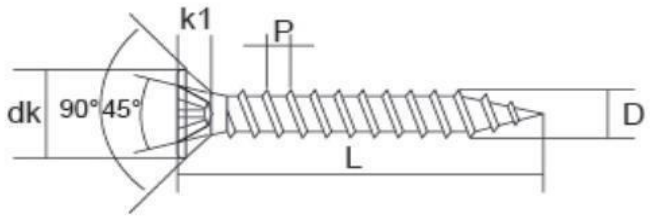

Double flat head Chipboard screw



Pozi Drive





PhillipsDrive

Flat head Chipboard screw

Size	Recess No. (pozi)	DK mm	D mm	P mm	Length mm
M2.5	1	4.60-4.90	2.30-2.45	1.10	10 - 25
M3.0	1	5.50-6.00	2.75-3.00	1.35	10 - 40
M3.5	2	6.50-7.00	3.20-3.50	1.60	12 - 50
M4.0	2	7.50-8.00	3.70-4.00	1.80	12 - 80
M4.5	2	8.50-9.00	4.20-4.50	2.00	16 - 80
M5.0	2	9.50-10.00	4.70-5.00	2.20	20 - 120
M6.0	3	11.50-12.00	5.70-6.00	2.60	30 - 200

AMASPRO INC

Tornillo de Cabeza Hexagonal para Madera
Hex Lag Screw

For connecting heavy lumber and other materials that bear an intense load

Specification	Head	Material	Finish
ASME, ANSI, DIN According to customer's drawing and samples	Hex Head	Carbon Steel	Blue White Zinc Plated/Hot dipped galvanized

Size	Length
1/4''~1/2''	1''~10''



Package : Bulk/Small box/Plastic Bag

Tornillo para Madera
Wood Screw

Commonly used in the door, building industry for cabinets, countertops, stairs, furniture.
Flat heads are countersunk into wood for a flush installation
Coarse threads and a sharp point make wood screws easy to install

Specification	Head	Material	Finish
ASME, ANSI, DIN According to customer's drawing and samples	Flat Head	Carbon Steel	Zinc Plated

Size	Length
#4~#14	1/2''~4''



Package : Bulk/Small box/Plastic Bag

Tornillo para Placa de Cemento
Cement Board screw


Fastening Cement Board to Metal Studs (Drill point)
Fastening Cement Board to Wood Studs (Sharp/ Spoon point)
Nibs under head clamp board firmly
Ceramic coating provides excellent protection fro corrosion
m

Specification	Head	Drive	Material	Finish
ASME, SAE, DIN According to customer's drawing and samples	Large wafer head with nibs	#2 Phillips	Carbon Steel Hardened	Blue White Zinc Plated/ Ceramic/Others



Sharp Point Punta de Fina
Drill Point Punta de Broca
Spoon Point Punta de Cuchara

Size	Length inch	Length mm
#8 M4.2	1-1/4''	32
	1-1/2''	38
	1-5/8''	41
	2''	50
	2-1/2''	64
	3''	75




Package: Bulk/Small box/Plastic Bag

Tornillo para Concreto
Concrete Screw

For anchoring into concrete, masonry, brick or block
Hi-Lo serrated thread design adds strength and reduces required installation torque
Blue Ruspert coating provides excellent protection from corrosio
n

Specification	Head	Drive	Material	Finish	Thread	Point
ASME,DIN Accordingto customer's drawing and samples	Flat Head/ Hex Washer Head	Phillips/ Slotted	Carbon Steel Hardened	Blue Ruspert Coating	Hi-Low with 3 Grooves on Thread	Nail Point

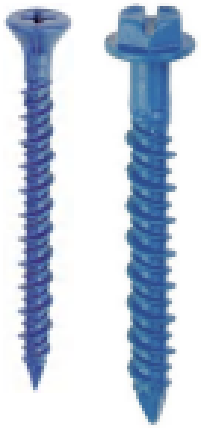

Size	Length
3/16''(M4.8)	1-1/4''~6'' (32mm~150mm)
1/4''(M6.3)	

Package: Bulk/Small box/Plastic Bag


AMASPRO INC

Tornillo para Panel Sándwich
Sandwich Panel Screw

Fastening sandwich panel to steel framing
Double thread for the purpose using exterior roofing environment
High thread under the head prevents panel stripout



Specification	Head	Material	Point	Finish
ASME, SAE, DIN According to customer's drawing and samples	Indent Hex Washer	Carbon Steel Hardened	#3, #5 Drill point	Blue White ZincPlated /Ruspeerst/Oth-

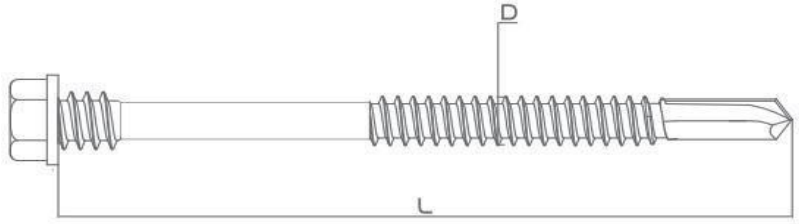


Size	Length inch	Length mm	Drill Point	Drill Capacity mm
#14 - 14/ #12 - 24 M6.3/M5.5	3''	75	#5	10.0 - 12.0
	3-1/2''	90	#5	10.0 - 12.0
	4''	100	#5	10.0 - 12.0
	5''	130	#5	10.0 - 12.0
	6''	150	#5	10.0 - 12.0
	7''	180	#5	10.0 - 12.0
	8''	200	#5	10.0 - 12.0
	10''	250	#5	10.0 - 12.0
	11''	280	#5	10.0 - 12.0

Package : Bulk/Small box

TornillodeFramer FarmerScrews,Head Coating

Fastening sheet-metal to walls and roofs
EPDM bonded steel washer ensures an effective seal and resisitance
Various colors as in RAL for selection

Specification	Head	Drive	Material	Finish	Point
ASME, SAE, DIN According to customer's drawing and samples	Indent Hex Washer	Hexagon	Carbon Steel Hardened	Blue White Zinc Plated, Head and steel washercolorful coating	#2 Drill Point

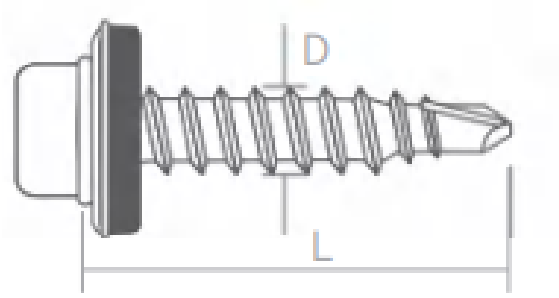



Size	Length inch	Length mm	Drill Point	Drill Capacity mm
#10-12 M4.8	3/4"	19	#2	1.0-1.60
	1''	25	#2	1.0-1.60
	1-1/8''	28	#2	1.0-1.60
	1-1/4''	32	#2	1.0-1.60
	1-1/2''	38	#2	1.0-1.60
	2''	50	#2	1.0-1.60
	2-1/2''	64	#2	1.0-1.60
	3''	75	#2	1.0-1.60

Package：Bulk/Small box

AMASPRO INC

Tornillo para Construcción de Madera
Wood Construction Screw

Widely used in wooden constructions
Type-17 slot is optimized to maximize drilling efficiency.
The addition of serration also greatly reduces the friction of penetration.

Specification	Head	Material	Drive	Thread	Finish
EN14592 According to customer's drawing and samples	Large Wafer CSK head/Double countersunk head with 6nibs /Hexwasher head	Carbon Steel Hardened	Torx drive	U-Thread Type 17 cuttingpoint	Zinc Plated/ Ruspert/Others

Size	Length
M3~M10	16~300mm



Large Wafer CSK head




Double CSK head with 6nibs



Hex washer head

Otros Sujetadores
Other Fasteners

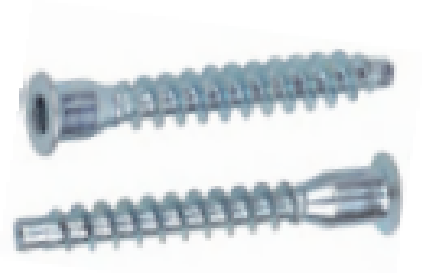

Confirmat Screw
Size:M5.0,M6.3,M7.0
Length: 40mm~70mm



Connecting Screw
Size: M4.0x45mm



Roof Hook: J Bolt+ Hex Nut+ Steel Washer+ Rubber Washer
Size:1/4''x2''~8''



Roof Hook: Straight Bolt+Hex Nut+ Steel Washer+ Rubber Washer
Size:1/4''x2''~16''



Concrete Screw Anchor Hex Washer Head
Size:M6.5~M14
Length:30mm~240mm




EPDM bonded Steel Washer
Size :14x(2.0+0.5) mm
16x(2.0+0.5)
mOmthers

AMASPRO INC

Otros Sujetadores
Other Fasteners



Hex Bolt/Tornillo Hexagonal

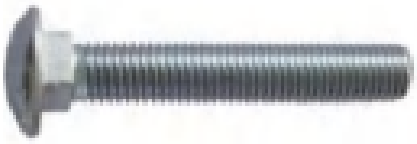

Carriage Bolt/Tornillo Coche



Hex Nut/Tuerca Hexagonal



Flat Washer/Rondana Plana



Threaded Rod/Varilla Roscada



Sleeve Anchor/Taquete



Platic Anchor with screw



Phillips Bit



Hex Socket Sleeve



Toggle Bolt Anchor Pan Head Screw



Rivet



Shooting Nail

Contact Information

AMASPRO INC America & Asia Products Inc

Office in Panama

People to Contact:	*Emails:*
Marco González-Gerente General	sales@amaspro.com – Gerencia General
César Rodríguez-Ventas Int.	sales1@amaspro.com – Ventas Int
Martin Castillero-Op. y Logistica	sales3@amaspro.com – Op. y Logistica
Elida Vega-Admon-Finanzas	contac1@amaspro.com – Admon-Finanzas
Dally Siles -Asistente Admon	sales2@amaspro.com – Asist.

Contact us Headquarters

•(507) 277-4083 •(507) 277-4183 •(507) 277-4153
•(507) 277-4253 •(507) 277-4283 •(507) 392-3640 •(507) 392-7271

Marketing Management in Costa Rica

People to Contact:	*Emails:*
Marco González-Gerente General	amasprocr@gmail.com – Gerencia
Yorleny Leiton -Ventas Int.	amasprocr1@gmail.com> – Ventas Int

Contact Offices Costa Rica

•(506) 2101-4485 •(506) 8674-2000 (celular) •(506) 8530-5252 (celular)